

### Features

- Two-handle gooseneck bathroom sink faucet
- 3-11/16" (94 mm) gooseneck spout with rosespray
- 7-5/16" (186 mm) wall-to-spout outlet
- 12 gpm (gallons per minute) maximum flow rate
- Lever handles with red/blue indexing (ADA-compliant with correct installation)
- Less drain
- Adjustable flanges
- External NPT connections

### Material

- Brass

### Installation

- Pairs with the Brockway wall-mounted wash sink

### Recommended Products/Accessories

- K-3200 36" wall-mount utility sink
- K-3202 48" wall-mount utility sink
- K-3203 60" wall-mount utility sink
- K-23723 Faucet cleaner



### Codes/Standards



ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
All applicable US Federal and State material regulations  
IAPMO Certification


### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SR	Vibrant Bright Nickel

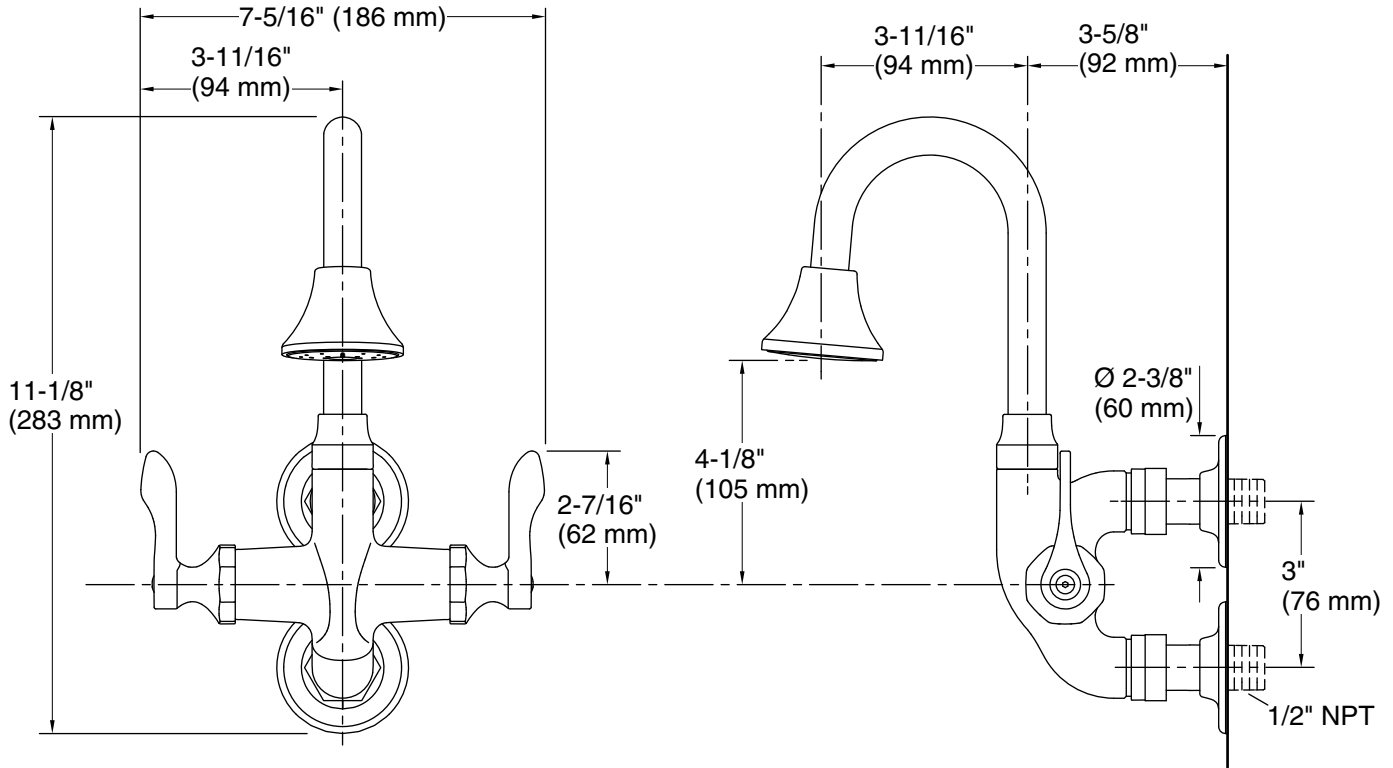

**Technical Information**

All product dimensions are nominal.

**Faucet:**

Flow rate: 12 gal/min (45.4 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

**Spout:**

Spout reach: 3-11/16" (93 mm)

**Notes**

Install this product according to the installation instructions.