Oblong 14" two-function rainhead, 1.75 gpm K-26295-G

#### **Features**

- Dual-function oblong rainhead features Full Coverage with Katalyst technology, a drenching spray experience ideal for rinsing shampoo from hair
- Deep Massage streams twist and swirl, targeting sore muscles to ease away aches and pains
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup
- Optimized sprayface for maximum performance
- 1.75 gpm (6.6 lpm) maximum flow rate at 80 psi (5.5 bar)
- Includes optional diverter (K-737-K) for control of rainhead spray functions; trim sold separately. When using a multioutlet valve, this diverter valve is not required
- Requires two-function rainhead arm and flange (sold separately)
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

#### Material

- Premium material construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

# Technology

 Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

### **Required Products/Accessories**

K-26326 10" ceiling-mount two-function rainhead arm and flange

or

K-26325 5" ceiling-mount two-function rainhead arm and flange

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### Included Components

K-737-K 3/4" Two- or Three-Way Diverter Valve





## Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium



# Oblong 14" two-function rainhead, 1.75 gpm K-26295-G

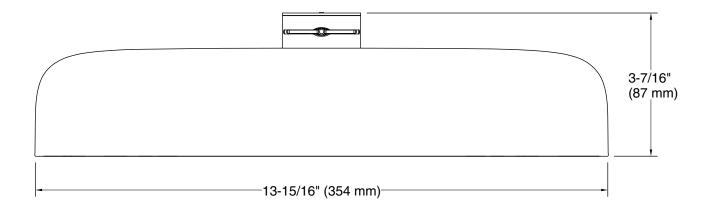

### **Technical Information**

All product dimensions are nominal.

# **Showerhead/Body Spray:**

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 80 psi (5.5 bar)

