KOHLER, Faucets

Rite-Temp® shower trim kit, 2.5 gpm K-TS27420-4

Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup
- Coordinates with other products in the Tone collection
- Requires Rite-Temp® pressure-balancing valve (sold separately)

Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER® finishes resist corrosion and tarnishing

Required Products/Accessories

K-8304 Series Rite-Temp® Valve & Cartridge Kits or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

Adapters, Rough-in and Extension Kits

10350 Range: 3-1/2" (89 mm) - 4-1/4" (108 mm)

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies 1307346 Retro mixer cap for K-304 Rite-Temp valve 1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-----------------------------------|
| | CP | Polished Chrome |
| | BN | Vibrant® Brushed Nickel |
| | BL | Matte Black |
| | 2MB | Vibrant® Brushed Moderne Brass |
| | CBL | Matte Black with Polished Chrome |
| | ВМВ | Matte Black with Moderne Brass |



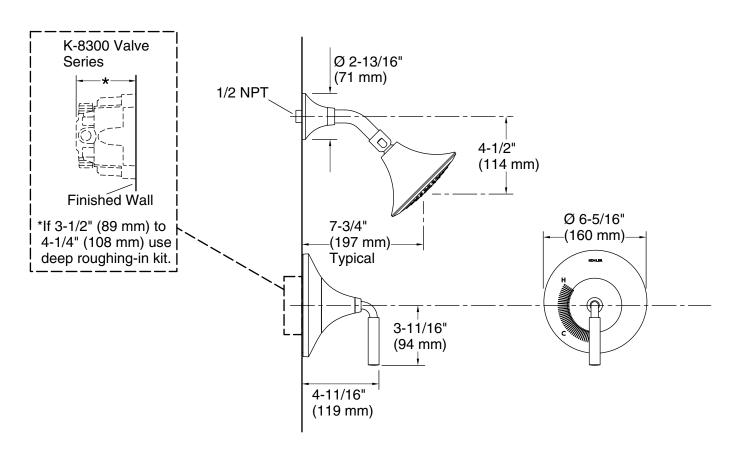

Technical Information

All product dimensions are nominal.

Drain included: No

Showerhead/Body Spray:

Rated maximum 2.5 gal/min (9.5 l/min)

flow:

Pressure: 45 psi (3.1 bar)

Notes

Install this product according to the installation instructions.

