## Single-handle bathroom sink faucet, 1.2 gpm

K-98146-4



### **Features**

- Single lever handle allows for both volume and temperature control
- Inlcudes metal pop-up drain with 1-1/4" tailpiece
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Single control bathroom sink faucet with 6" optional escutcheon plate included
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)

### Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

### Installation

- For single-hole or 4" (102 mm) centerset installation (escutcheon plate included)
- Preattached flexible supply lines simplify installation
- 4-3/8" (111 mm) spout reach

### **Recommended Products/Accessories**

K-23726 Drain treatment K-23723 Faucet cleaner





### Codes/Standards

IAPMO Certification

OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**


Color tiles intended for reference only.

**Color Code Description** 


CP Polished Chrome



### July™ Single-handle bathroom sink faucet, 1.2 gpm K-98146-4

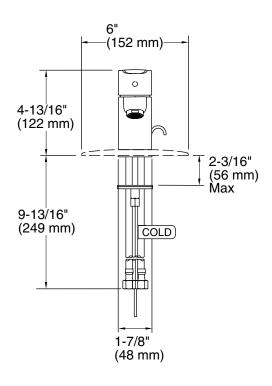

**KOHLER**, Faucets

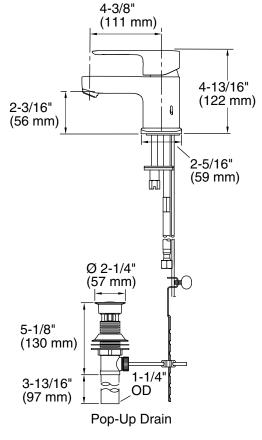

### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Spout:

Spout reach: 4-3/8" (111 mm)

### **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

