# Coralais®

KOHLER. Faucets Single-handle bathroom sink faucet, 1.2 gpm, project pack

K-15182-4DRA

#### **Features**

- 1.2 gpm (4.5 lpm) maximum flow rate
- 4-3/16" (107 mm) stationary spout reach
- Single lever handle allows for both volume and temperature
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Red/blue indexing on handle
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- Includes plastic pop-up drain with 1-1/4" tailpiece
- Coordinates with Coralais faucets, accessories, and showering components to complete your bathroom

## Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

## Installation

- Bath- or deck-mount
- Preattached flexible supply lines simplify installation
- Preassembled handle and flexible supply hoses simplify installation
- For 4" (102 mm) centers

## **Recommended Products/Accessories**

K-23726 Drain treatment K-23723 Faucet cleaner

## **Optional Products/Accessories**

1160594 .35 gpm Aerator, Large





## Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992

EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

# **KOHLER® Faucet Lifetime Limited** Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description


Polished Chrome



# **Coralais®**

**KOHLER** Faucets Single-handle bathroom sink faucet, 1.2 gpm, project pack

## K-15182-4DRA

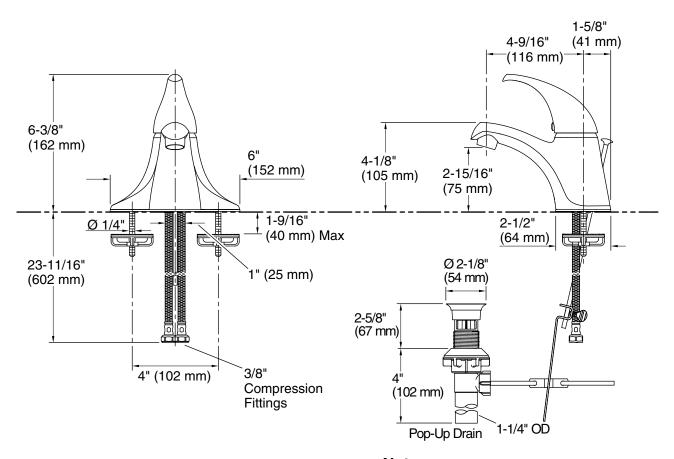

## **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes Drain with overflow: Yes

Spout:

Spout reach: 4-9/16" (116 mm)

## **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

