

Features

- KOHLER Konnect® app lets you control PerfectFill drain system from anywhere and create up to ten temperature and fill-level presets
- AutoFill feature closes drain and fills bath to desired level and temperature; no monitoring necessary
- AutoDrain automatically opens drain after preset bath duration elapses; drain can also be operated via the app, voice assistant, or on/off button
- Warm Up/Cool Down function removes and adds water, maintaining your desired temperature throughout the bath; can be set to run automatically or when prompted
- Manual Bath Fill lets you run a normal bath without timer or digital drain features
- Wall-mount remote on/off button allows you to manually start/stop water or open/close drain
- No internal linkages, reducing the chance of clogs in the overflow pipe
- Ball-joint construction for easy installation
- Kit includes above-the-floor drain assembly, PerfectFill controller, drain fittings, remote on/off button, and mounting hardware
- Controller is equipped with rubber feet for locating on a countertop or shelf; can also be wall-mounted
- Requires bath spout (sold separately)
- Requires drain trim kit and two-port digital thermostatic valve or three-port digital thermostatic valve for use with handshower (sold separately)
- Add DTV+™ to control PerfectFill through the DTV+ interface (sold separately)

Material

- Schedule 40 PVC with metal overflow cover
- Reinforced engineering-grade thermoplastic casing on controller
- KOHLER® finishes resist corrosion and tarnishing

Technology

- KOHLER Konnect® app pairs with Amazon Alexa and Google Home for hands-free PerfectFill functionality

Installation

- Above-the-floor

Required Products/Accessories

- K-31800 Bath drain trim kit
- K-31801 Drain trim kit for Tea-for-Two® baths
- K-528-K1 Digital Two-Port Thermostatic Valve
- K-557-K1 Three-Port Digital Thermostatic Valve




Codes/Standards

ASME A112.18.2/CSA B125.2
UL 1951
CSA C22.2 No. 14
CSA C22.2 No. 68
IAPMO Certification
cUL Listed

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

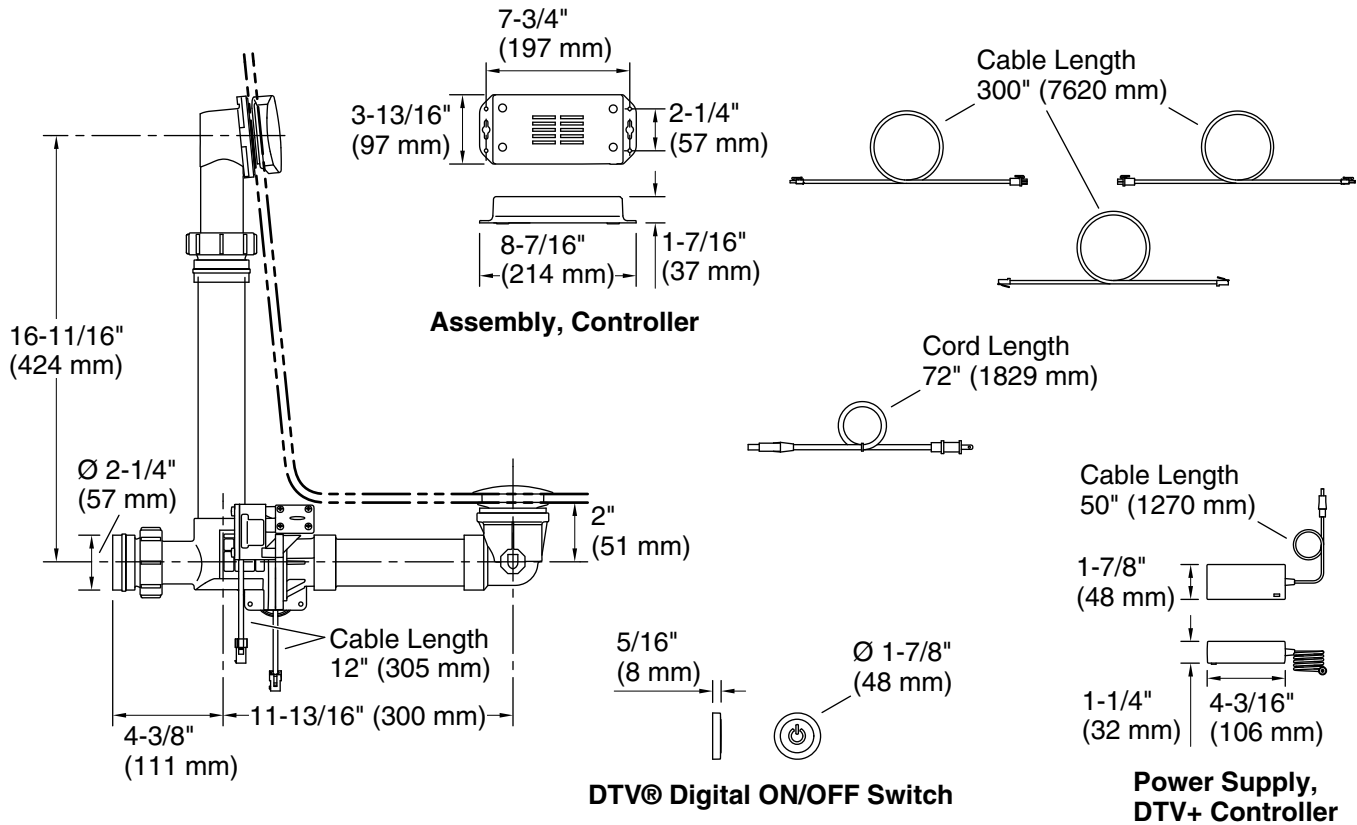

Required Electrical Service

One circuit required.

120/240 V, 50/60 Hz

Technical Information

All product dimensions are nominal.

Power source: Plug - AC, included

Drain included: Yes

Notes

Install this product according to the installation guide.