

Castia[™] by Studio McGee

Widespread bathroom sink faucet, 1.2 gpm K-35908-4

Features

- Designed in collaboration with Studio McGee
- Two lever handles offer separate control of hot and cold water
- 6" (152 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Metal touch-activated drain with 1-1/4" tailpiece
- Coordinates with other products in the Castia collection

Material

- Premium material construction for durability and reliability
- KOHLER[®] finishes resist corrosion and tarnishing

Installation

- For 8" 16" (203 406 mm) centers
- Deck-mount
- Handles are preassembled on valves to simplify installation

Adapters, Rough-in and Extension Kits

1280146

Range: 1-1/2" (38 mm) -1-1/2" (38 mm)

Recommended Products/Accessories

K-23723 Faucet cleaner K-23726 Drain treatment K-35925 18" towel bar K-35926 24" towel bar K-35927 Double robe hook K-35928 Towel ring K-35929 Toilet paper holder







Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

CP	
SN	
BN	
BL	

- CP Polished Chrome
- SN Vibrant® Polished Nickel
- BN Vibrant® Brushed Nickel

Matte Black


Vibranto Durahad Madaua



Castia™ by Studio McGee

KOHLER, Faucets

Widespread bathroom sink faucet, 1.2 gpm K-35908-4

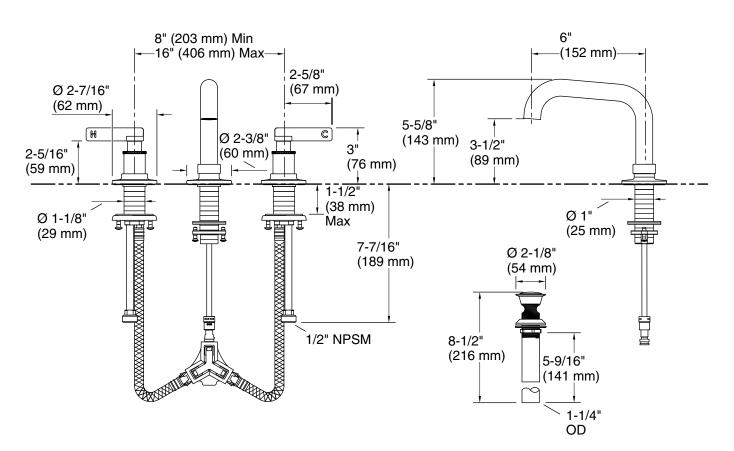

Technical Information

All product dimensions are nominal.

Faucet:

Spout reach:

Spout:	
Drain with overflow:	Yes
Drain included:	Yes
Pressure:	60 psi (4.1 bar)
Flow rate:	1.2 gal/min (4.5 l/min)

6" (152 mm)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

