Features

- Metal construction
- Single-function handshower with 60" (1524 mm) length hose
- 8-1/4" (210 mm) spout reach
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- High-temperature limit setting for added safety
- 8.0 gpm (30.3 lpm) maximum bath faucet flow rate at 45 psi (3.1 bar)
- Coordinates with Composed faucets, accessories, and showering components to complete your bathroom

Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

Installation

Deck- or bath-mount

Recommended Products/Accessories

K-23723 Faucet cleaner

K-73141 18" Towel Bar

K-73142 24" Towel Bar

K-73144 24" Double Towel Bar

K-73145 towel arm

K-73146 Double Robe Hook

K-73147 Pivoting toilet paper holder

K-73148 Vertical toilet paper holder





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) IAPMO Certification

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium





Composed®

Deck-mount bath faucet with handshower K-73078-4

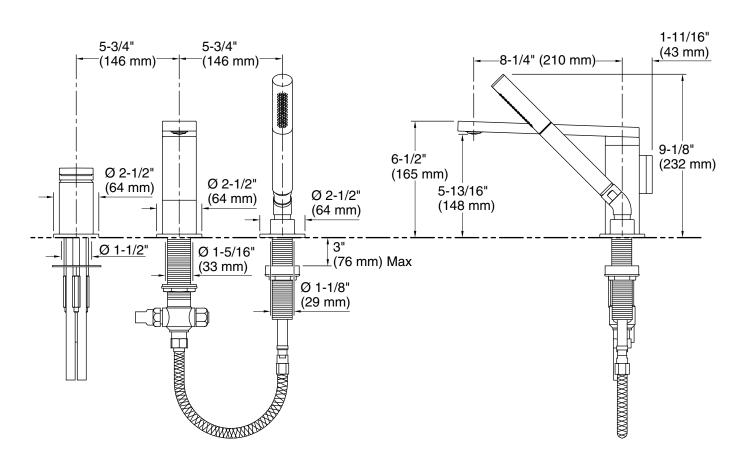

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 8 gal/min (30.3 l/min) Pressure: 45 psi (3.1 bar)

Drain included: No

Spout:

Spout reach: 8-1/4" (210 mm)

Handshower:

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 80 psi (5.5 bar)

Notes

For use with automatic compensating valves rated at 1.31 gal/min (5 l/min) or less. Install this product according to the installation guide.

