# Widespread bathroom sink faucet, 1.0 gpm K-97352-4K



### **Features**

- Two lever handles offer separate control of hot and cold water
- 5-13/16" (148 mm) spout reach
- 1.0 gpm (3.8 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Includes metal pop-up drain with 1-1/4" metal tailpiece
- Coordinates with other products in the Avid collection
- Three-hole installation for 8" to 16" centers

#### Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

## Installation

- Handles are preassembled on valves to simplify installation
- Flexible supply lines and quick-connect fittings simplify installation

## **Recommended Products/Accessories**

K-97494 18" towel bar

K-97495 24" towel bar

K-97496 24" double towel bar

K-97498 towel arm

K-97499 robe hook

K-97500 double robe hook

K-97502 Vertical toilet paper holder

K-97503 Covered toilet paper holder





## Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

**CSA B651** 

OBC

**IAPMO** Certification

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass





# Widespread bathroom sink faucet, 1.0 gpm K-97352-4K

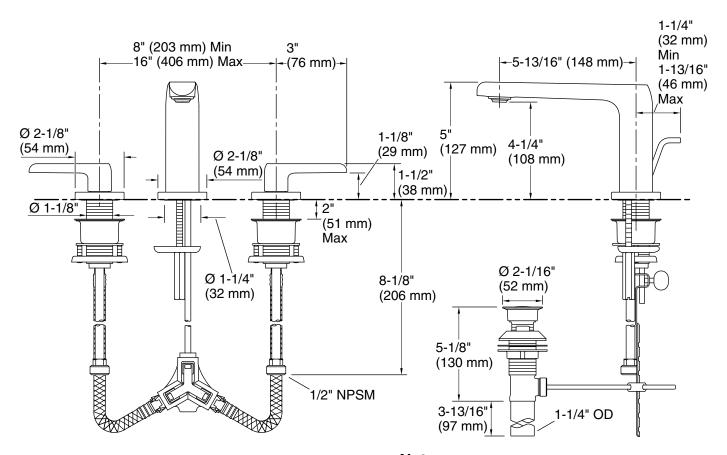

### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1 gal/min (3.8 l/min)
Pressure: 60 psi (4.1 bar)

Drain included: Yes
Drain with overflow: Yes

Spout:

Spout reach: 5-15/16" (151 mm)

### **Notes**

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

