## **Purist®**

# **KOHLER** Faucets

Wall-mount bathroom sink faucet trim with Cross handles, 1.2 gpm K-T14413-3

#### **Features**

- Dual-control wall-mounted
- Cross handles
- Stationary spout
- Less drain
- 6-3/4" (171 mm) Max 35° spout from wall to center of drain
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)

#### Material

- Brass
- KOHLER® finishes resist corrosion and tarnishing

#### **Required Products/Accessories**

K-410-K Wall-mount Valve

#### **Recommended Products/Accessories**

K-23726 Drain treatment

K-23723 Faucet cleaner

K-14375 24" Double Towel Bar

K-14377 Pivoting toilet paper holder

K-14435 18" Towel Bar

K-14436 24" Towel Bar

K-14441 Towel Ring

K-14443 Robe Hook

K-14444 Vertical toilet paper holder

#### **Optional Products/Accessories**

K-7107 Decorative Drain

K-7108 Decorative Drain

K-7114 Pop-Up Drain

K-7129 Drain

K-7127 Drain





### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

**IAPMO** Certification

# KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black










Wall-mount bathroom sink faucet trim with Cross handles, 1.2 gpm K-T14413-3

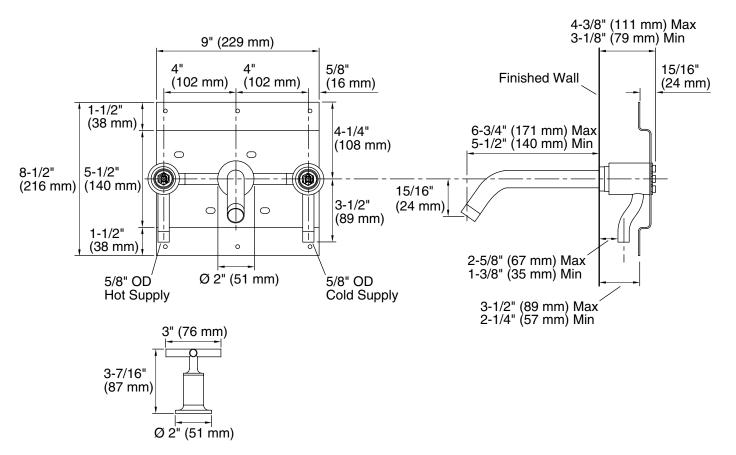

#### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

Spout:

Spout reach: 6-3/4" (171 mm)

#### **Notes**

Install this product according to the installation guide.

The distance between the bottom of spout and top of the fixture rim must not be less than 1-1/2" (38 mm) and not greater than 6" (152 mm).

Three 1-1/2" (38 mm) diameter cutout holes are

required for spout and handles.

ADA compliant for handles only.

ADA compliant when installed to the specific requirements of these regulations.

