

# Sliding shower door, 70-1/2" H x 50-1/4 - 53-5/8" W **K-707607-6L**

#### **Features**

- Frameless design emphasizes glass and creates a sleek, minimalist look
- Vertical handle with inside knob on moving panel
- Gently-curved towel bar provides integrated storage on fixed panel
- Tempered glass ensures enhanced safety and durability
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Smooth, easy-to-clean wall jambs
- Full-length moving panel seal provides excellent water containment
- Upgrade to heavy 5/16" (8 mm) thick glass and tall height shower door by selecting K-707614-8L
- Coordinates with other products in the Elate collection
- Shower door configuration consists of one sliding panel and one stationary panel

### Material

- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

#### Installation

- Fits opening widths 50-1/4" 53-5/8" (1276 1362 mm)
- 70-1/2" (1791 mm) high, with 67-11/16" (1719 mm) minimum head clearance
- 3-3/8" (86 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality



### Codes/Standards

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

# **KOHLER® Bath and Shower Doors Ten-Year Limited Warranty**

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

| C | olor | Code | Description   |
|---|------|------|---------------|
|   |      | SH   | Bright Silver |
|   |      | MX   | Matte Nickel  |
|   |      | BL   | Matte Black   |


# Available Glass Options

**Code Description** 

L Crystal Clear



# Sliding shower door, 70-1/2" H x 50-1/4 - 53-5/8" W **K-707607-6L**

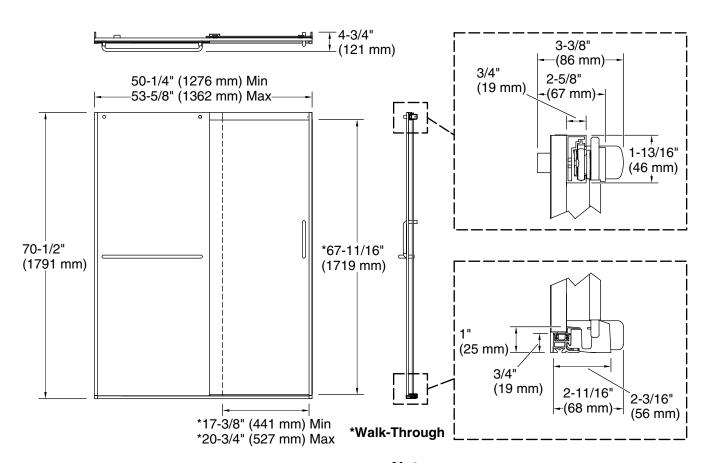

# **Technical Information**

All product dimensions are nominal.

Base-To-Wall 1/2" (13 mm)

Radius – Max:

#### **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 73-13/16" (1875 mm) to allow for installation clearance.

