# **KOHLER**<sub>®</sub>

77" H sliding shower door with 3/8"-thick glass K-709080-10L

#### Features

- Frameless design emphasizes glass and creates a sleek, minimalist look
- Vertical handle with inside knob on moving panel
- Tempered glass ensures enhanced safety and durability
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Smooth, easy-to-clean wall jambs
- SealNetik<sup>™</sup> full-length magnetic seal keeps door firmly closed, providing excellent water containment
- Shower door configuration consists of one sliding panel and one stationary panel
- Coordinates with other products in the Rely collection

### Material

- Frameless, 3/8" (10 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

### Installation

- Fits opening widths 44-5/8" 47-5/8" (1134 1210 mm)
- 77" (1956 mm) high, with a lofty 73-7/8" (1876 mm) minimum head clearance
- 3" (76.2 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential and hospitality use



Codes/Standards ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

KOHLER<sup>®</sup> Bath and Shower Doors Ten-Year Limited WarrantyKOHLER<sup>®</sup> Bath and Shower Doors Commercial One-Year Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
1	SHP	Bright Polished Silver
1	BNK	Anodized Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

#### Available Glass Options Code Description


L Crystal Clear



# **Rely**®




77" H sliding shower door with 3/8"-thick glass K-709080-10L

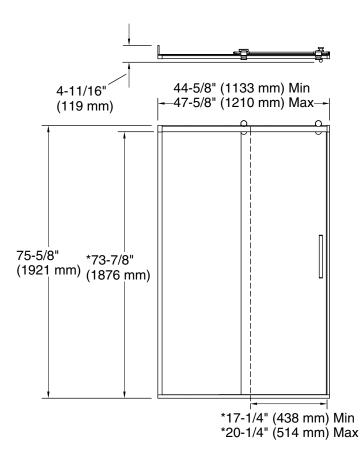

# **Technical Information**

All product dimensions are nominal. Base-To-Wall 1/2" (13 mm) Radius – Max:

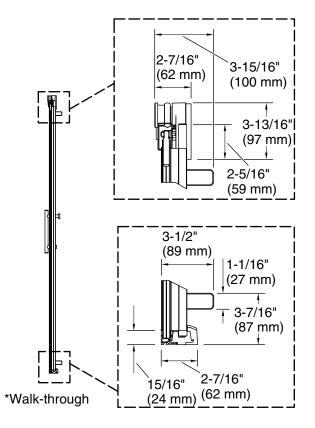

#### Notes

The vertical opening should be a minimum of 78-1/2" (1994 mm) to allow for installation clearance.

