

# Composed™

Frameless pivot shower door K-27604-10L

#### **Features**

- Frameless design emphasizes glass and creates a sleek, minimalist look
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment
- Innovative L- bracket secures the fixed panel in place and gives it a sturdy feel while also being unobtrusive to the showering space
- Continuous 7/8" (22 mm) high aluminum bottom threshold
- Back-to-back 11-1/2" (292 mm) vertical handles
- Coordinates with other products in the Composed® collection
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

### Material

- Frameless, 3/8" (10 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

## Installation

- Fits opening widths 45-1/4"–46" (1149–1168 mm)
- 3/4" (19 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality

## **Included Components**

27714-10L 3/8" pivot door glass and hardware, no handle K-27678 11-1/2" shower door handle



### Codes/Standards

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

## **KOHLER® Bath and Shower Doors Ten-Year Limited Warranty**

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

| Color | Code | Description             |
|-------|------|-------------------------|
|       | SHP  | Bright Polished Silver  |
|       | BL   | Matte Black             |
| 1     | BNK  | Anodized Brushed Nickel |

# Available Glass Options

Code Description


L Crystal Clear





# Composed™

Frameless pivot shower door K-27604-10L

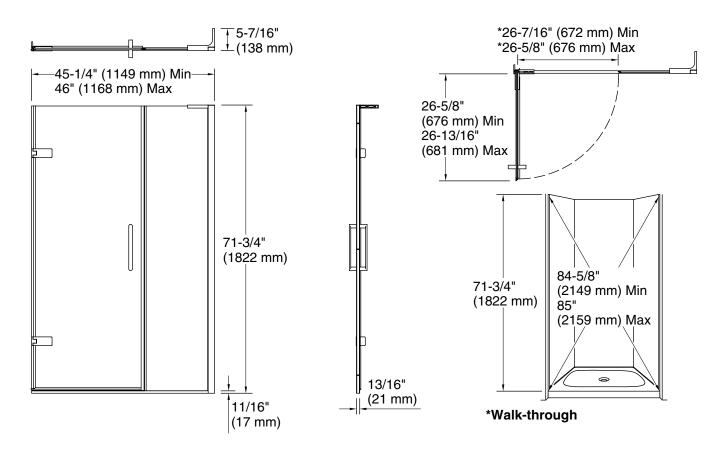

## **Technical Information**

All product dimensions are nominal. 1/4" (6 mm) Base-To-Wall

Radius – Max:

### **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 73-1/2" (1867 mm) to allow for installation clearance.

