

### Features

- Tandem Generators 26kW and 30kW require two drain pans

### Material

- KOHLER<sup>®</sup> finishes resist corrosion and tarnishing
- Recommended for Kohler Steam Generators 13, 15, 26, 30 kW
- 3/4" NPT Outlet for drain connection
- Protects against water damage from leaks or pressure relief






### Codes/Standards

None Applicable

### KOHLER<sup>®</sup> Steam Generator Three-Year Limited Warranty

See website for detailed warranty information.

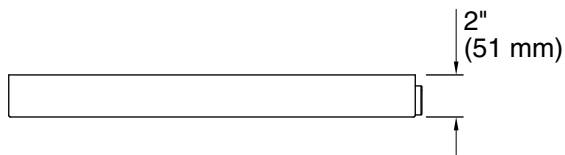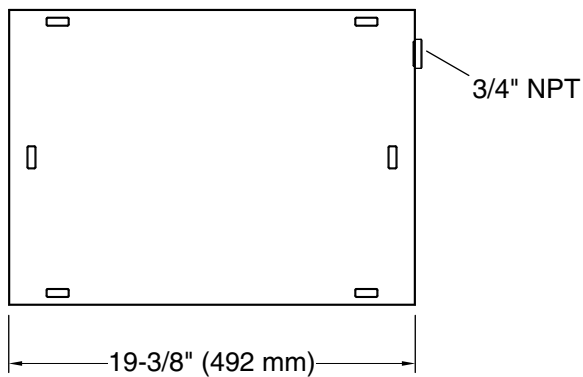

**Technical Information**

All product dimensions are nominal.

Drain included: No

**Notes**

Install this product according to the installation guide.