

# **Levity® Plus**

Frameless sliding bath door K-702420-L

#### **Features**

- Frameless design emphasizes glass and creates a sleek, minimalist look
- Innovative roller design with stainless steel bearings simplifies installation and provides out-of-plumb adjustability while glass is installed
- Interior and exterior towel bars provide integrated storage on the doors
- Cushioned center guide provides smooth, quiet sliding action
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Smooth, easy-to-clean wall jambs
- Tempered glass ensures enhanced safety and durability

#### Material

- Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

### Installation

- Fits opening widths 56-5/8" 59-5/8" (1438 –1514 mm)
- 61-9/16" (1564 mm) high, with 55-9/16" (1411 mm) minimum head clearance
- 3" (76.2 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- For residential use only
- Not for use in hospitality



#### Codes/Standards

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

## **KOHLER® Bath and Shower Doors Ten-Year Limited Warranty**

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	2MB	Vibrant® Brushed Moderne Brass
	BL	Matte Black
	BNK	Anodized Brushed Nickel

# **Available Glass Options**

**Code Description** 


L Crystal Clear





# **Levity® Plus**

Frameless sliding bath door K-702420-L

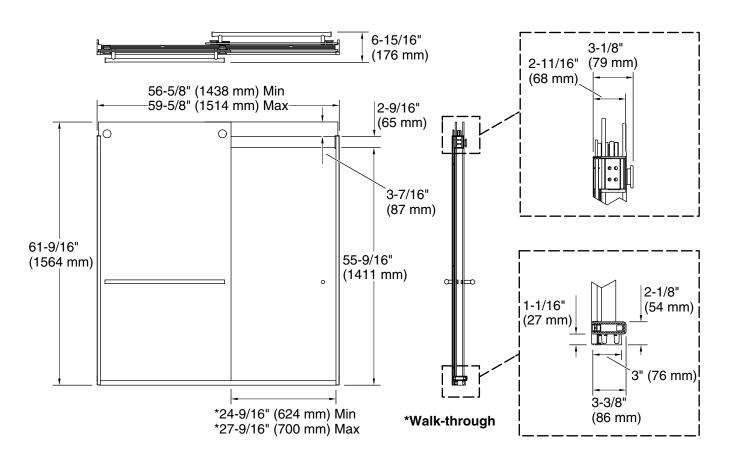

### **Technical Information**

All product dimensions are nominal.

Base-To-Wall 1/2" (13 mm)

Radius - Max:

Shower Ledge Min 3" (76 mm)

Flat:

Shower Wall Min 3-1/2" (89 mm)

Flat:

#### **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 64-1/2" (1639 mm) to allow for installation clearance.

