



# 67" x 31-1/2" freestanding bath **K-819-F62**

#### **Features**

- Freestanding design creates a striking focal point in your bathing area
- Integral lumbar support on both ends
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Slotted overflow allows for deep soaking
- Center toe-tap drain
- Includes one wooden pedestal base, four cast iron adjustable feet, and one wooden overflow/drain shroud
- Coordinates with other products in the Rêve collection



- KOHLER® enameled cast iron
- Painted exterior
- Wood composite pedestal base with Brilliant Blanc painted finish

#### Installation

Freestanding

# **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

# **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-23726 Drain treatment

K-23725 Cast iron cleaner

K-31795 Slotted overflow above-the-floor bath drain kit

K-31797 Slotted overflow bath drain kit



### Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462 IAPMO Certification

# **KOHLER® Enameled Cast Iron Bath** and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.


#### Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

0 White



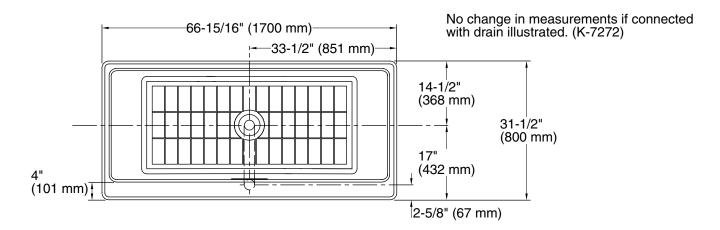

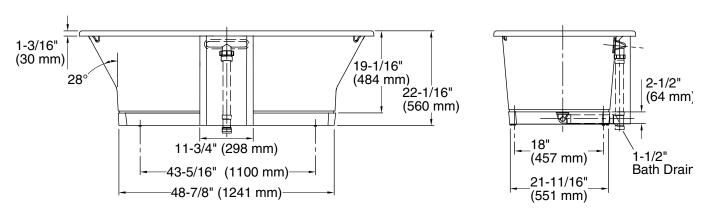

#### **Technical Information**

All product dimensions are nominal.

Drain location: Center

Basin area, bottom: 49" x 22" (1245 mm x 559 mm)

Basin area, top: 62-1/2" x 24-3/4" (1588 mm x 629 mm)

Weight: 365 lbs (165.6 kg)

Minimum floor load: 70 lbs/ft² (341.8 kg/m²)

Water depth: 15-1/4" (387 mm)

Water capacity: 75 gal (283.9 L)

#### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will

vary.

