

Touchless single-hole lavatory faucet with Kinesis® sensor technology, DC-powered, less drain K-104BB76-SBNA

Features

- Kinesis[®] technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- AA battery-powered; up to four-year battery life (approx. 105,000 cycles)
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant aerator
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- 5-1/8" (130 mm) spout reach
- Less drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)
- Includes spout assembly, control box assembly, four AA batteries, supply hose, and standard mounting hardware

Material

Brass spout

Technology

 Kinesis[®] sensor technology offers on-demand detection for maximum water savings

Installation

Single-hole mounting





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

KOHLER® One-Year Limited

Warranty

See website for detailed warranty information.

Polished Chrome

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


CP



Oblo®

KOHLER, Faucets

Oblo® Touchless single-hole lavatory faucet with Kinesis® sensor technology, DC-powered, less drain K-104BB76-SBNA

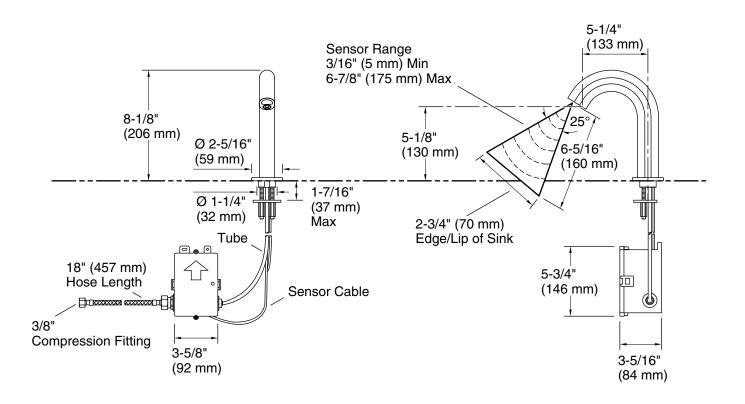

Technical Information

All product dimensions are nominal.

Power source: Battery - DC, included

Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

Drain with overflow: No

Spout:

Spout reach: 5-1/4" (134 mm)

Pressure/fixture Supply Requirements

Fixture pressure 125 psi (861.8 kPa) max (static): Fixture pressure min 20 psi (137.9 kPa) (static):

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



