Accliv™

KOHLER, FAUCETS Touchless single-hole lavatory faucet, less drain, 0.35

gpm K-103A36-SBTA

Features

- Operates via battery, plug-in AC power, or Hybrid Energy System (each sold separately)
- Design-forward aesthetic for commercial bathroom spaces
- Below-counter valving reduces the faucet footprint and provides easier service
- 0.35 gpm (1.3 lpm) maximum flow rate with vandal-resistant aerator
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- 4" (102 mm) spout reach
- Pair with select KOHLER® soap dispensers and single or two-hole escutcheons for an easy retrofit
- ٠ Includes spout and control box assemblies, and standard mounting hardware
- Less drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)

Material

Premium material construction for durability and reliability

Installation

Single-hole mounting

Recommended Products/Accessories

K-13480 AC Single Supply K-13480-A AC Single Supply K-13481 Multi-Outlet Power Supply K-13481-A Multi-Outlet Power Supply K-24154 Mechanical mixing valve K-36264 DC-powered battery pack for commercial touchless faucets K-28520 High-efficiency battery pack for commercial touchless sensor faucets

Optional Products/Accessories

K-38166 8" two-hole escutcheon plate for Insight[™] and Kinesis® lavatory faucets and soap dispensers K-38167 4" two-hole escutcheon plate for Insight[™] and Kinesis® lavatory faucets and soap dispensers K-38168 8" two-hole escutcheon plate for Insight[™] and Kinesis® lavatory faucets and soap dispensers K-38169 4" two-hole escutcheon plate for Insight[™] and Kinesis® lavatory faucets and soap dispensers





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

CP **Polished Chrome**



Accliv™

KOHLER. FAUCETS Touchless single-hole lavatory faucet, less drain, 0.35 gpm K-103A36-SBTA

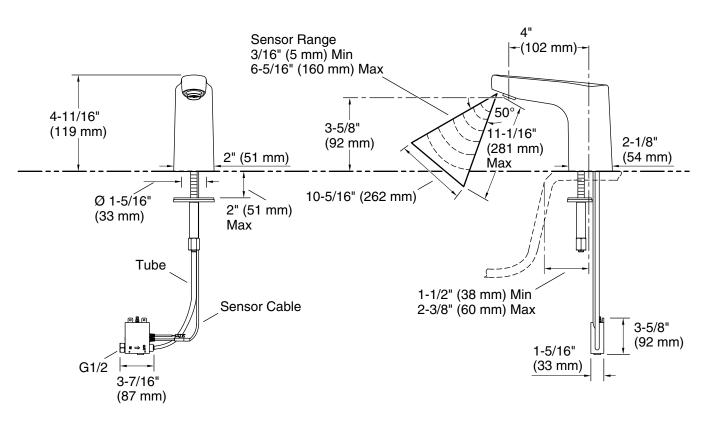

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

110/220 V

Technical Information

All product dimensions are nominal.

Power source: Hardwire - AC and Plug - AC, not included

Faucet:

Flow rate:	0.35 gal/min (1.3 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	No
Drain with overflow:	Yes

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

