KOHLER Faucets Touchless faucet w/Kinesis® sensor, Hybrid-powered K-126L36-SANL

Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- Powered by Kohler's Hybrid Energy System (HES), which provides maintenance-free power for up to 30 years (approx. 875,000 cycles)
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant laminar outlet
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- 8-1/8" (206 mm) spout reach
- Grid drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)
- Includes spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware

Material

- Brass spout
- Cast brass valve

Technology

 Kinesis® sensor technology offers on-demand detection for maximum water savings

Installation

- Wall-mount
- Includes one hybrid cell

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner

Included Components

K-7129-A Drain



CSA B651 ADA OBC

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1

CSA B651 OBC

IAPMO Certification

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

CP Polished Chrome



Loure®

KOHLER Faucets Touchless faucet w/Kinesis® sensor, Hybrid-powered K-126L36-SANL

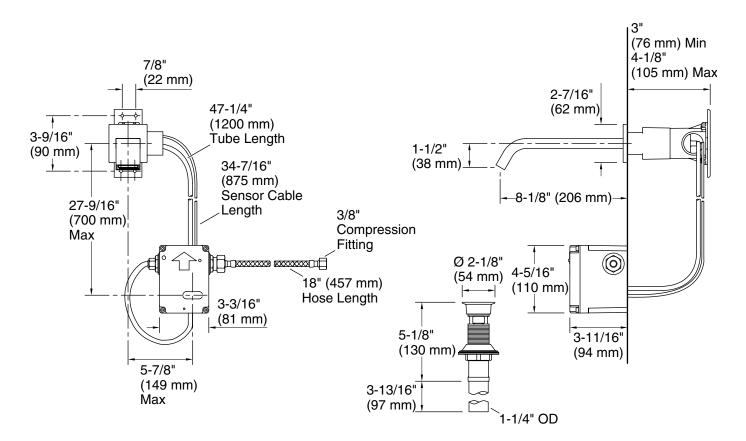

Technical Information

All product dimensions are nominal.

Power source: Hybrid Energy Cell, included

Faucet:

0.5 gal/min (1.9 l/min) Flow rate:

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

