



60" x 34-1/4" alcove bath, right drain **K-714**

Features

- 60" (1524 mm) x 34-1/4" (870 mm) x 14" (356 mm)
- Our most popular bath
- Integral apron for quick installation
- Integral lumbar support
- Integral apron
- Right drain
- Safeguard® slip-resistant surface provides excellent traction underfoot

Material

KOHLER® enameled cast iron

Installation

- Alcove
- Integral flange

Required Products/Accessories

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-78438 30" cable bath drain

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-706000-D3 Frameless Sliding Bath Door

K-706000-L 62" H sliding bath door with 1/4"-thick glass

K-706004-D3 Frameless Sliding Bath Door

K-706004-L Frameless Sliding Bath Door

K-23726 Drain treatment

K-23725 Cast iron cleaner



ADA

Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462 ADA ICC/ANSI A117.1 IAPMO Certification

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Riccuit





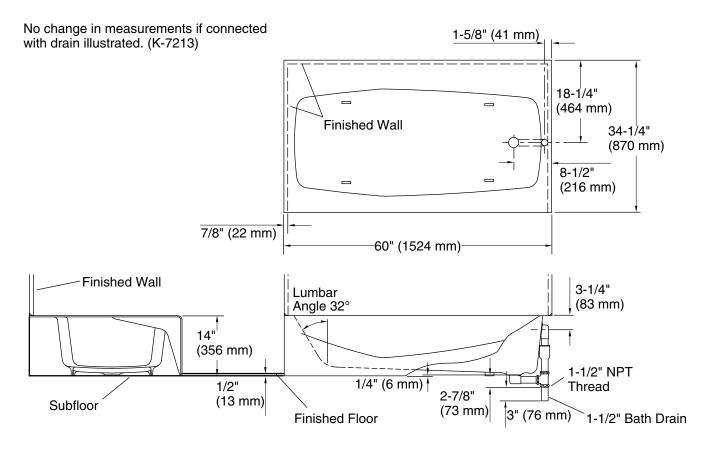

Technical Information

All product dimensions are nominal.

Drain location: Right

Basin area, bottom: 45" x 22" (1143 mm x 559 mm) Basin area, top: 55" x 24" (1397 mm x 610 mm)

 Weight:
 330 lbs (149.7 kg)

 Minimum floor load:
 51 lbs/ft² (249 kg/m²)

 Water depth:
 8-5/8" (219 mm)

 Water capacity:
 33 gal (124.9 L)

 Minimum flat for
 1-7/8" (47 mm)

door:

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

