

Wallmount Sink Faucets with Integral Check Stops

TECK®
COMMERCIAL

DELTA

SPECIFICATION: (EXAMPLE)

- **CAST BRASS** two handle wallmount sink faucet
- With integral stops
- 203mm (8") centers, polished chrome plated finish
- **BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
- ADA compliant color indexed metal lever or blade handles with vandal resistant screws
- **CER-TECK®** 1/4 turn ceramic structures and...
 - with... (add spout required)
 - with... (add outlet required)
 - with... (add handle required)
 - with... adjustable centers (add Suffix **-AC** if required – see back page)

28C6423



28C6944



Engineer/Architect Approval

Model Specified:

Approval:

Date:

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

28C6933-AC

Variation

- 2 = 8" (203 mm) tubular spout
- 4 = 11" (279 mm) tubular spout
- 9 = 6" (152 mm) gooseneck spout

Outlet

- 2 = Vandal resistant laminar outlet 1.5 gpm (5.7 L/min)
- 3 = Vandal resistant aerator 1.5 gpm (5.7 L/min)
- 4 = Standard aerator outlet 1.5 gpm (5.7 L/min)

Handle

- 3 = Hooded lever
- 4 = Blade w/sanitary hood

AC = 5.5" to 10.5" adjustable centers

R* = Optional gooseneck spout dimensions:
R7 = 9" long

S* = Optional swing spout dimensions:
S8 = 14" Tubular

AVAILABLE MODELS		VARIATIONS		
HANDLES	3	2 Tubular S5 Spout 8" (203 mm) 	4 Tubular S7 Spout 11" (279 mm) 	9 Gooseneck R4 Spout 6" (152 mm) long 
	3 Hooded Lever 3" (76 mm)  	28C6223 28C6233 28C6243	28C6423 28C6433 28C6443	28C6933 28C6933-AC 28C6933-R7 28C6943
HANDLES	4 Blade with Sanitary Hood 4" (102 mm)  	28C6224 28C6224-S8 28C6234 28C6244	28C6424 28C6434 28C6444	28C6924 28C6934 28C6944

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

Flow Rates are at 60 PSI.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-28C6 Rev. E

Wallmount Sink Faucets with Integral Check Stops

TECK
COMMERCIAL




APPROVALS:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- For commercial use only
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

FLOW RATE vs PRESSURE

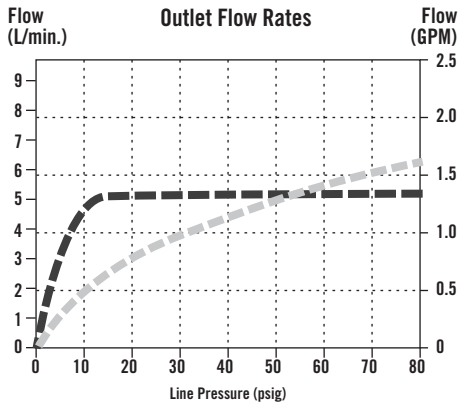



FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

See **DSP-R/S** for detailed specification.


FOR OPTIONAL SWING SPOUTS

See **DSP-S/S** for detailed specification.


FRONT VIEW

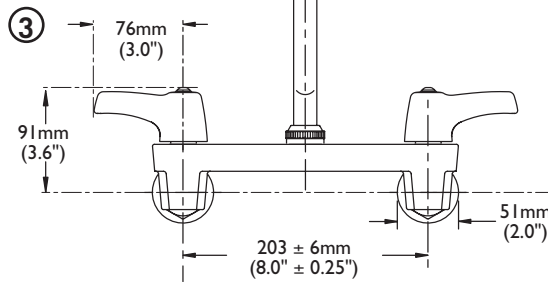



GOOSENECK SPOUTS

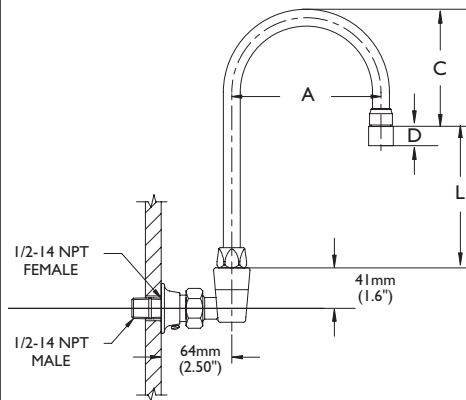

SWING SPOUTS

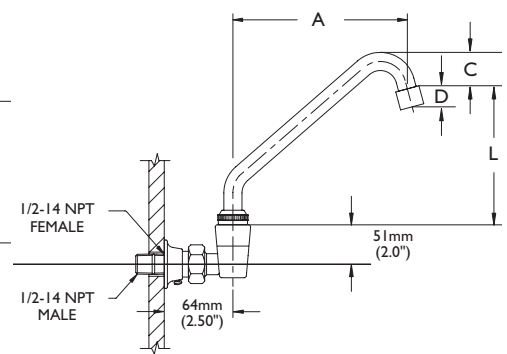

ADJUSTABLE CENTERS (AC) or separate order of 063105A

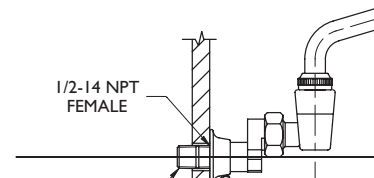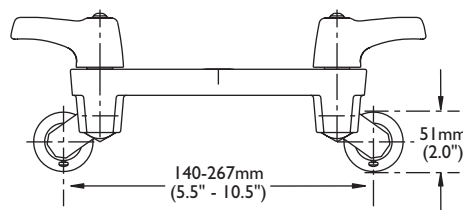

GOOSENECK SPOUT ASSEMBLIES

SPOUT NO.	SPOUT/OUTLET	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
9	Gooseneck-Standard (R4)	152	6	124	4.9	146	5.8

SWING SPOUT ASSEMBLIES

SPOUT NO.	SPOUT/OUTLET	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
2	8" Tubular Spout (S5)	210	8.25	51	2.0	147	5.8
4	11" Tubular Spout (S7)	303	11.94	48	1.9	100	3.95

OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67

INLETS - 1/2" FIP/MIP

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

DSP-28C6 Rev. E

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.