

# KOHLER® Faucets

## Mach® WAVE

Touchless retrofit toilet flushometer, DC-powered, 1.6 gpf

### K-40TD00R10-RF

#### Features

- 1.6 gpf (6.0 lpf)
- Activation distance is factory-set
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Engineered for optimal performance with KOHLER® commercial fixtures
- 125-micron filter protects internal components
- No external flush volume adjustment ensures water conservation
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Includes 1.5V AA alkaline batteries
- Less stop valve and tailpiece

#### Material

- Brass construction with durable Polished Chrome finish

#### Technology

- Flushometer activates when hand is waved over electronic infrared WAVE sensor
- Patented piston technology for superior flush volume accuracy

#### Installation

- Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection

#### Recommended Products/Accessories

K-23723 Faucet cleaner  
1421939 Flushometer Arm Extension Kit  
1509698 Pressure Gauge Kit, 1/8"

#### Optional Products/Accessories

GP1118986 Flushometer Extension Kit  
K-10313 Flushometer 12" rough-in kit



ADA

CSA B651

OBC

#### Codes/Standards

ASME A112.18.1/CSA B125.1  
ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC  
IAPMO Certification

#### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

|  |    |                 |
|--|----|-----------------|
|  | CP | Polished Chrome |
|--|----|-----------------|

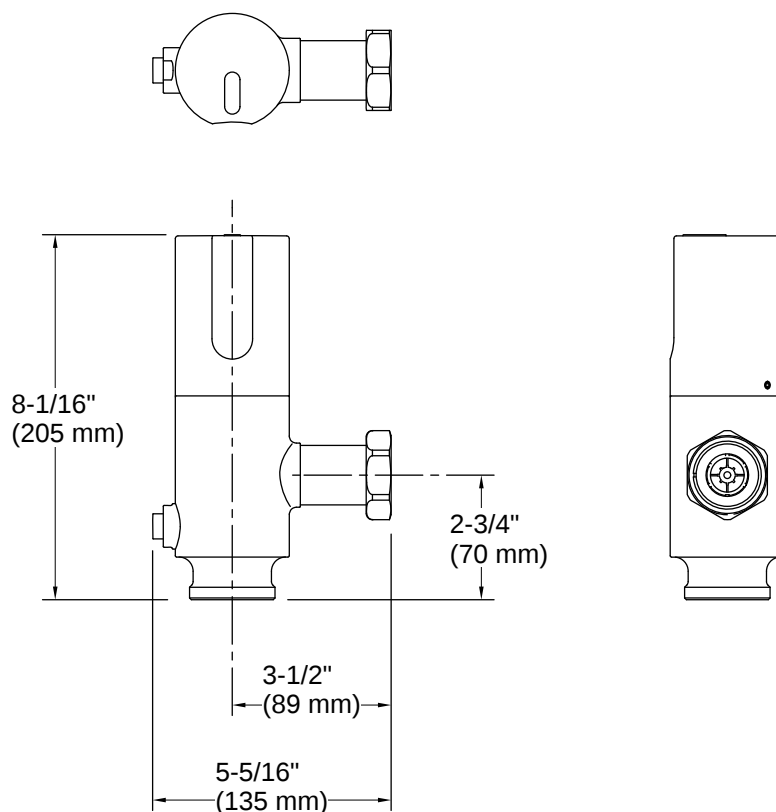

### Technical Information

All product dimensions are nominal.

#### Spout:

#### Handshower:

Rated maximum flow: 0 gal/min (0 l/min)

### Pressure/fixture Supply Requirements

Fixture pressure max (static): 80 psi (551.6 kPa)

Fixture pressure min (static): 35 psi (241.3 kPa)

Min flowing pressure: 25 psi (172.4 kPa)

Min flow rate: 25 gpm (94.6 lpm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.