



# Highcliff™ Ultra

Top spud flushometer bowl  
K-96057-B

## Features

- Elongated bowl offers added room and comfort
- 4-bolt base for added stability
- 1-1/2" (38 mm) top spud
- 10" x 7" (254 mm x 178 mm) water surface
- 10" or 12" (254 or 305 mm) rough-in
- 2-1/8" (54 mm) fully glazed trapway

## Material

- Vitreous china

## Technology

- Designed to outperform competitors in bowl cleanliness and plug resistance
- Maximum waste removal
- Engineered for toilet seat cover removal
- Excellent bowl rinse
- Engineered to flush effectively in buildings with low supply pressure and flow
- Maximum drain line carry at all flush volumes per ASME standard

## Installation

- Replaces Highcliff K-4368-B. Height and footprint may vary



ADA

CSA B651

OBC

## Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC  
IAPMO Certification

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



|   |       |
|---|-------|
| 0 | White |
|---|-------|

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

12-10-2024 22:56 - US/CA


THE BOLD LOOK  
OF **KOHLER®**



# Highcliff™ Ultra

## Top spud flushometer bowl

### K-96057-B

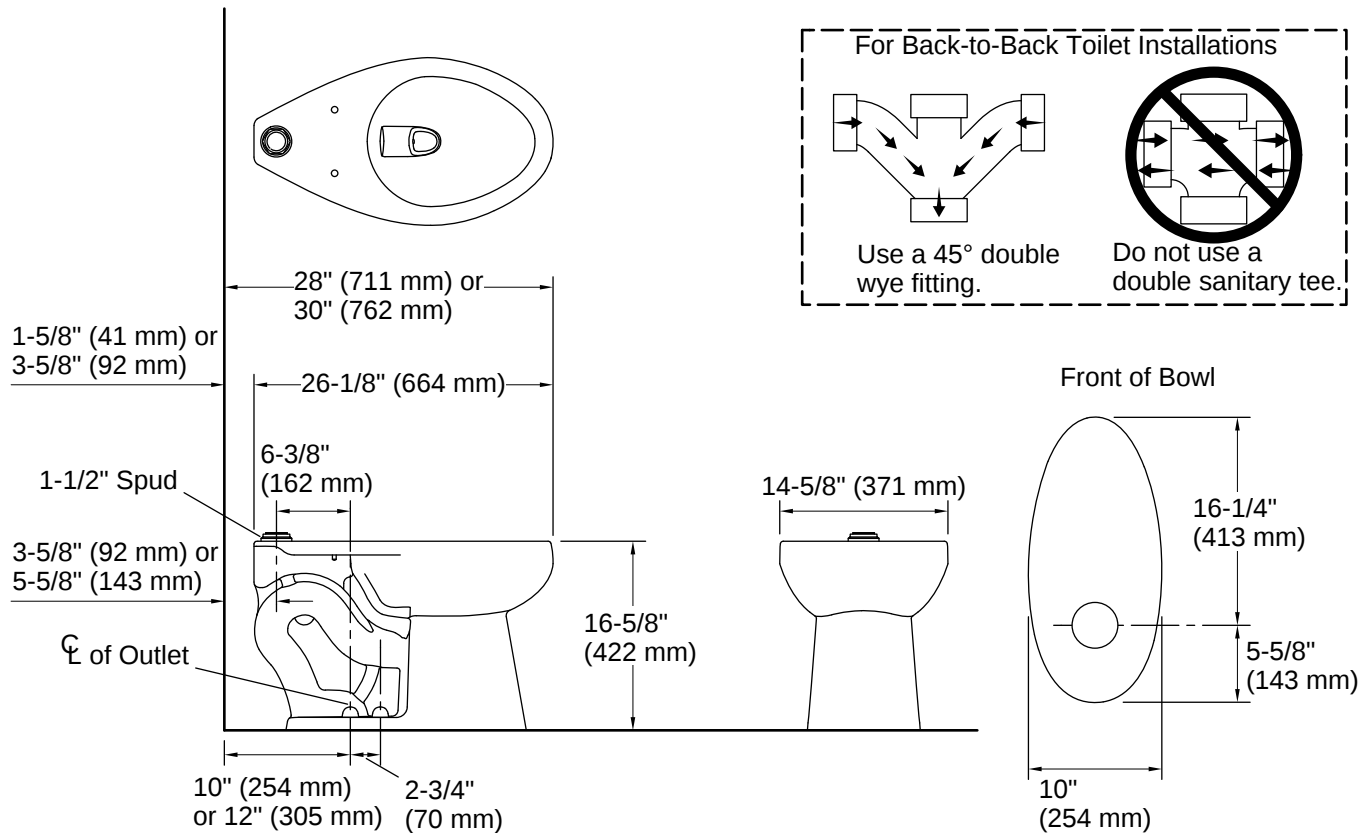

### Technical Information

All product dimensions are nominal.

|                       |                            |
|-----------------------|----------------------------|
| Toilet type:          | Floor-mount                |
| Waste Outlet:         | Floor                      |
| Bowl shape:           | Elongated                  |
| Flush type:           | Flushometer valve siphon   |
| Spud size:            | Inlet, Top                 |
| Trap passageway:      | 2-1/8" (54 mm)             |
| Water surface size:   | 10" x 7" (254 mm x 178 mm) |
| Rim to water surface: | 6" (152 mm)                |
| Rough-in:             | 12" (305 mm)               |
| Seat-mounting holes:  | 5-1/2" (140 mm)            |

### Fixture Supply Requirements

|                       |                    |
|-----------------------|--------------------|
| Min static pressure:  | 35 psi (241.3 kPa) |
| Max static pressure:  | 80 psi (551.6 kPa) |
| Min flowing pressure: | 25 psi (172.4 kPa) |

Min flow rate: 2.5 gpm (0.4 Gpm)

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

12-10-2024 22:56 - US/CA

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

THE BOLD LOOK  
OF **KOHLER**