



Top spud flushometer bowl with bedpan lugs K-4352-L

Features

- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Bedpan lugs included
- 1-1/2" (38 mm) top spud
- 4" (102 mm) rough-in
- 2-1/8" (54 mm) fully glazed trapway
- 1.28 or 1.6 gpf (4.8 or 6.0 lpf) depending on flushometer specified

Material

Vitreous china

Installation

Seat and supply line sold separately

Recommended Products/Accessories

K-4670-CA Lustra™ Commercial elongated toilet seat with antimicrobial agent and check hinge





ADA **CSA B651**

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® **ADA** ICC/ANSI A117.1 **CSA B651** OBC **IAPMO Certification**

KOHLER® One-Year Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

0 White





Top spud flushometer bowl with bedpan lugs K-4352-L

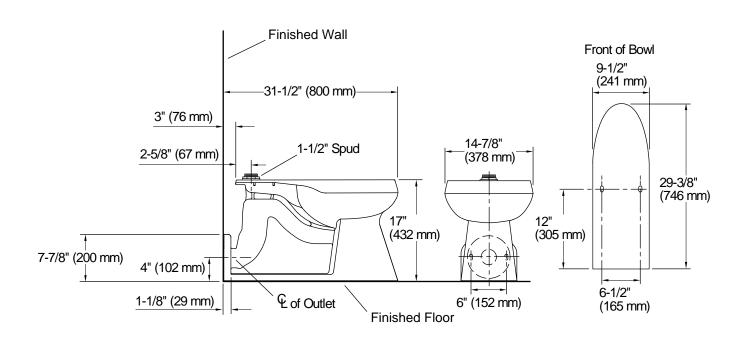

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Siphon jet
Spud size: 1 1/2, Inlet, Top
Trap passageway: 2-1/8" (54 mm)

Water surface size: 12" x 10" (305 mm x 254 mm)

Rim to water 5-7/8" (149 mm)

surface:

Rough-in: 4" (102 mm)
Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

For back-to-back installations: Connect the toilet to the vertical stack using a: double fixture fitting, double combination wye and 1/8 bends, or double wye and 1/8 bends.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms

Accessibility standards may require controls to be located on the open side of the toilet.

