

Cast Deckmount Sink Faucets

COMMERCIAL



SPECIFICATION: (EXAMPLE)

- **HEAVY DUTY CAST BRASS** centerset faucet
- 4" (102mm) centers, two handle
- Polished chrome-plated finish with polished underspout
- Metal hold-down package
- Designed for routine 180°F (82°C) disinfection cycles up to 30 mins
- **CER-TECK®** 1/4 turn ceramic structures

OPTIONAL FEATURES

- Color indexed metal handles with vandal resistant screws
- Copper Defense™ technology with CuVerro Shield™ alloys
 - Safe to use, no harmful chemicals
 - Efficacy for life of the product
 - Durable materials
 - Laboratory testing has shown that when cleaned regularly this surface:
 - Reduces bacteria contamination, achieving 99.9% reduction within 2 hours of exposure
 - Delivers continuous and ongoing antibacterial action

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

21C144-TI

Variation

- 1 = Less pop-up, no pop-up hole
- 2 = Metal pop-up
- 3 = Cast open grid strainer
- 4 = Cast ADA offset open grid strainer
- 5 = Chain stay

Outlet

- 2 = Vandal resistant laminar outlet
- 3 = Vandal resistant aerator
- 4 = Standard aerator outlet
- 5 = Vandal resistant spray outlet
- 9 = Vandal resistant spray outlet

- 1.5 gpm (5.7 L/min)
- 1.5 gpm (5.7 L/min)
- 1.5 gpm (5.7 L/min)
- 0.5 gpm (1.9 L/min)
- 0.35 gpm (1.32 L/min)

Handle

- 1 = 5-Fluted
- 2 = Hooded blade
- 3 = Hooded lever
- 4 = Blade w/sanitary hood
- 5 = Wrist w/sanitary hood
- 8 = Self-closing hooded lever
- 9 = Self-closing 5-Fluted

Options

- BLANK** = Default
- TI** = Handle temperature indicators "H" (red), "C" (blue)
- CV** = Handles with CuVerro® bactericidal surfaces

Available Models		Variations				
		1	2	3	4	5
		Centerset, Less Pop-Up (No Pop-Up Hole) 4" (102 mm)	Centerset with Metal Pop-Up 4" (102 mm)	Centerset with Open Grid Strainer 4" (102 mm)	Centerset with ADA Offset Open Grid Strainer 4" (102 mm)	Centerset with Chain Stay, Less Plug & Chain 4" (102 mm)
Handles	1 5-Fluted	21C121 21C131	21C141 21C151	21C231 21C241		
	2 Hooded Blade 4" (102 mm)	21C122 21C132 21C132-TI 21C142	21C142-TI 21C152 21C152-TI	21C232 21C242 21C252-TI		21C542
	3 Hooded Lever 3" (76 mm)	21C123 21C133 21C133-TI 21C143 21C143-TI	21C143-CV 21C153 21C153-TI 21C193	21C233 21C243 21C253	21C333 21C453	21C553
	4 Blade with Sanitary Hood 4" (102 mm)	21C124 21C124-TI 21C134 21C134-TI 21C144	21C144-TI 21C154 21C154-TI 21C194	21C224 21C234 21C244 21C254	21C334 21C424	
	5 Wrist with Sanitary Hood 6" (152 mm)	21C135 21C145 21C155		21C245		
	8 Self-Closing Hooded Lever 3" (76 mm)	21C138 21C148 21C198				
	9 Self-Closing 5-Fluted	21C149				

Suffix "CV" models:

Clean and sanitize according to standard practice. Healthcare facilities must maintain the product in accordance with infection control guidelines. The use of this surface is a supplement to and not a substitute for standard infection control practices; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. This surface has been shown to reduce microbial contamination, but does not necessarily prevent cross contamination.

CuVerro® and CuVerro Shield™ are registered trademarks of Wieland North America, Inc. and are used with permission. Watersense® is a registered trademark of the U.S. Environmental Protection Agency.

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Flow Rates are at 60 PSI.
NOTICE Use all pages as product submittal sheets.

Cast Deckmount Sink Faucets

COMMERCIAL

APPROVALS:

- Complies to ASME A112.18.1/CSA B125.1
-  Indicates compliance to ICC / ANSI A117.1
-  Outlet options 2, 3 and 4 are EPA WaterSense® listed
-  Verified compliant with 0.25% weighted average Pb content regulations
- Suffix "-CV" models are surfaced with CuVerro® alloys which are registered with Health Canada PMRA and the EPA

HANDLE TEMPERATURE INDICATORS

- Suffix "-TI" signifies handle temperature indicators "H" (red), "C" (blue). Available on selected models.



COPPER DEFENSE™ HANDLES WITH CUVERRO® BACTERICIDAL SURFACES

(Available for separate order)


- 061392A** - Convert to "-CV" #2, 4" hooded blade handles
- 061393A** - Convert to "-CV" #3, 3" hooded lever handles
- 061394A** - Convert to "-CV" #4, 4" blade handles with sanitary hood
- 061395A** - Convert to "-CV" #5, 6" wrist handles with sanitary hood

SELF-CLOSING SPRING PACKAGES

(Available for separate order)

- 061369A** Springs ONLY to convert #3 Hooded Lever Handle model to #8 Self-closing Hooded Lever

FLOW RATE VS PRESSURE:

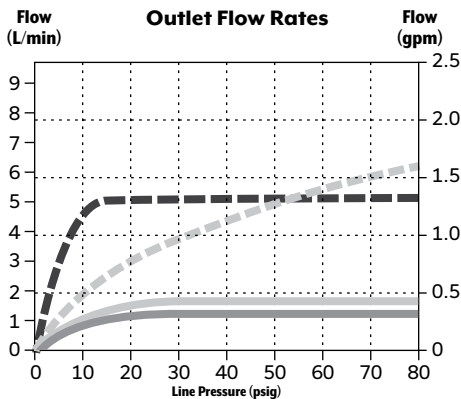


NOTICE Measurements may vary $\pm 0.25"$ (6mm)

Suffix "-CV" models:

Clean and sanitize according to standard practice. Healthcare facilities must maintain the product in accordance with infection control guidelines. The use of this surface is a supplement to and not a substitute for standard infection control practices; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. This surface has been shown to reduce microbial contamination, but does not necessarily prevent cross contamination.

CuVerro® and CuVerro Shield™ are registered trademarks of Wieland North America, Inc. and are used with permission. Watersense® is a registered trademark of the U.S. Environmental Protection Agency.

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

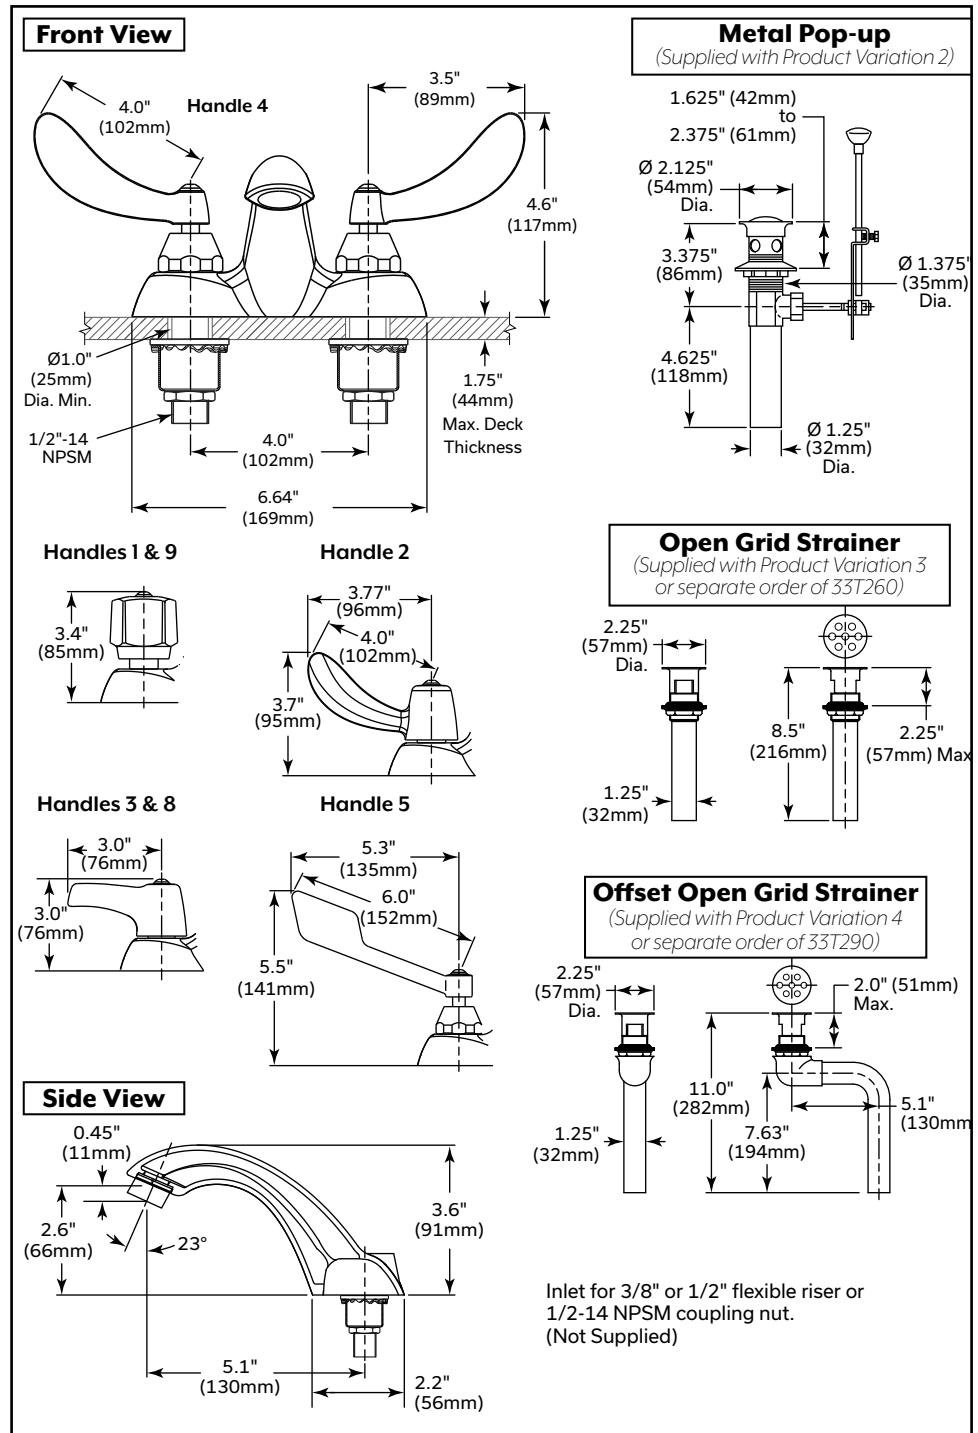

Engineer/Architect Approval

Model Specified:

Approval:

Date:

Flow Rates are at 60 PSI.

NOTICE Use all pages as product submittal sheets.

DSP-21C, Rev I