



**Expanse®**  
60" x 32" alcove bath, right drain  
**K-1100-RA**

**Features**

- Curved basin creates a comfortable bathing experience
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface

**Material**

- Acrylic

**Installation**

- Right drain
- Alcove

**Required Products/Accessories**

K-T37391 Rotary-turn bath drain trim

K-T37392 Rotary-turn bath drain trim

or

K-37385 rough-in cable drain, PVC, 45" cable

K-78439 45" cable bath drain

**Recommended Products/Accessories**

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-23726 Drain treatment



**Codes/Standards**

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL Listed

**KOHLER® Plastic Baths and  
Receptors Lifetime Limited Warranty**  
See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*




| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



0

White

No change in measurements if connected with drain illustrated. (K-7213)

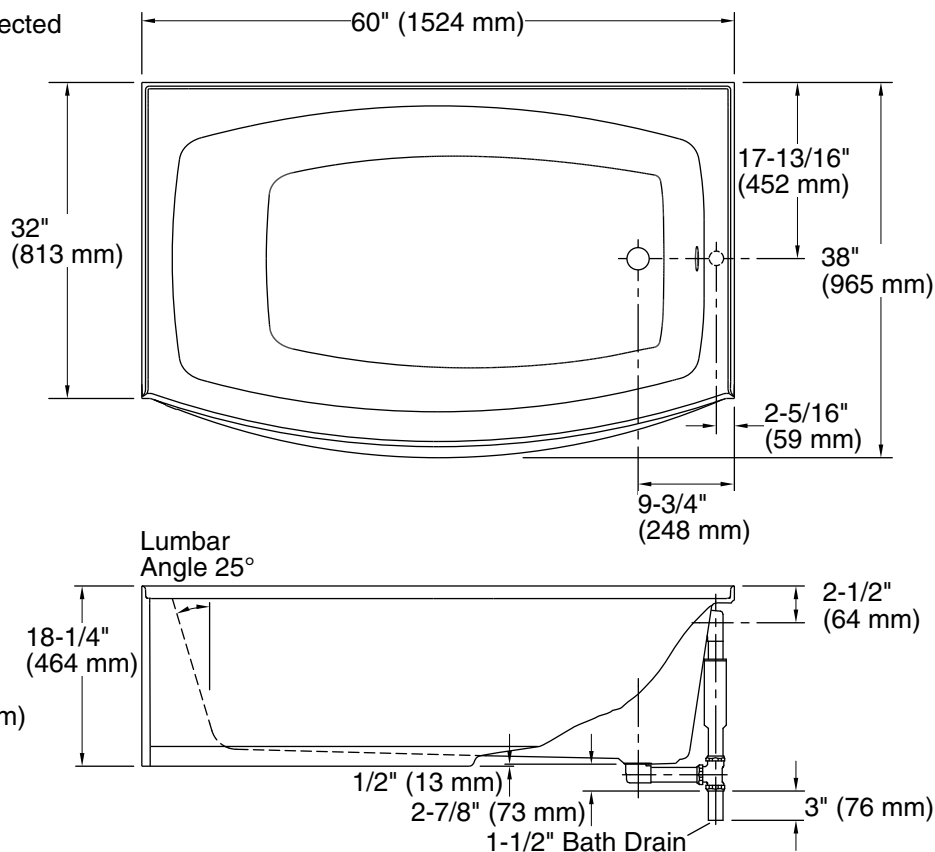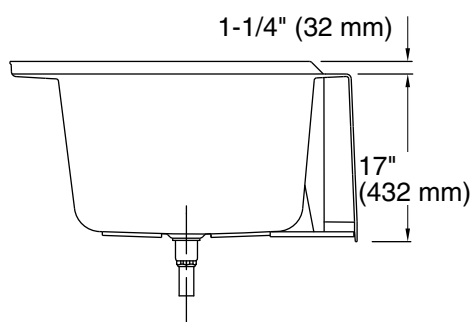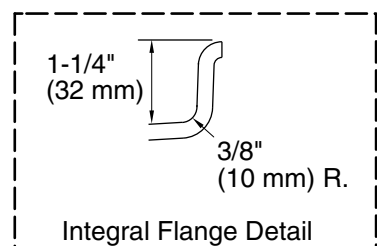

## Technical Information

All product dimensions are nominal.

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Drain location:     | Right                                             |
| Basin area, bottom: | 45-11/16" x 27-5/8" (1160 mm x 702 mm)            |
| Basin area, top:    | 54" x 31" (1372 mm x 787 mm)                      |
| Weight:             | 78 lbs (35.4 kg)                                  |
| Minimum floor load: | 38 lbs/ft <sup>2</sup> (185.5 kg/m <sup>2</sup> ) |
| Water depth:        | 12-5/8" (321 mm)                                  |
| Water capacity:     | 60 gal (227.1 L)                                  |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.