

CaBano

#4938

Generation tub spout

INSTALLATION GUIDE



Last revision: October 23rd


I. Installation Notice

1. Install water supply lines in accordance with this manual.
2. Floor drain should be installed in the location of the faucet.
3. Install exposed parts except valve bodies only after the completion of house interior decoration in case paint or other chemicals erode faucet surface.
4. Clean pipes before installation to get rid of mud, sand or other debris.
5. If the thread of pipes don't match well with product, please find out the reason first, otherwise a forced connection will damage the faucet.
6. After installation, ensure all the joints are firmly connected. Then turn on water supply and open faucet repeatedly to make sure there are no leaks. At this stage, the product is ready for normal use.
7. Keep the manual to the user.

II. Operation Notice

1. The working condition of this product is water pressure 0.05~1.0MPa, water temperature 4~90°C.
2. Do not hang heavy things on the faucet.
3. Make sure the faucet is off when no water comes out of it (especially when nobody resides in or during the period of decoration or suspend of water).
4. Regularly clean the surface of faucet to keep it bright. Attention: do not use inappropriate tools such as sharp brushes, rough sponges, scouring pads or corrosive detergent to clean the faucet, and we do not recommend that you use the detergent sold in the market, because its formula is changing frequently. Please clean the faucet by a wet cotton cloth with soapy water, then rinse and dry with a soft cotton cloth after each time of usage.
5. Please adjust to comfortable temperature before washing to avoid scald.
6. Do not disassemble the product unless you are an expert.

III. Installation Diagram

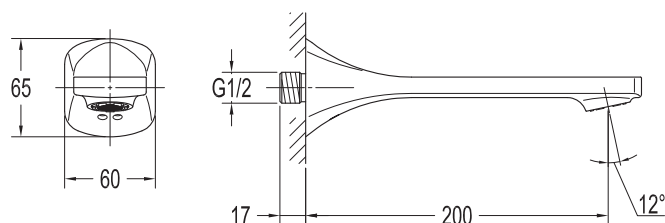


IV. Installation Steps(Fig.1-6):


* The installation diagram is only for reference. The product is subject to the real object.

1


Prepare and check the following tools.




Spanner



Teflon Tape




S3 Wrench (supplied)



Wrench (supplied)


2

Loosen M6 screw with S3 wrench and remove connector.

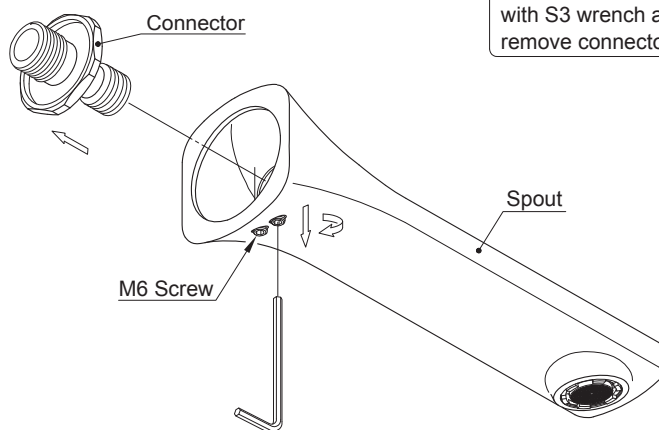


3

Wrap connector with Teflon tape. Screw it to the inlet against the wall.

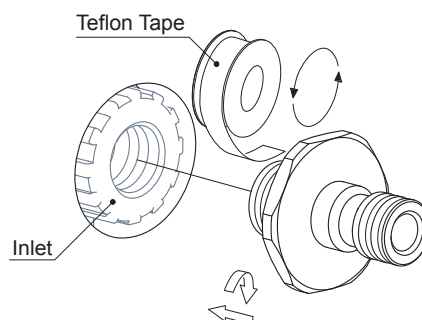


4

Install spout to the connector against the wall.

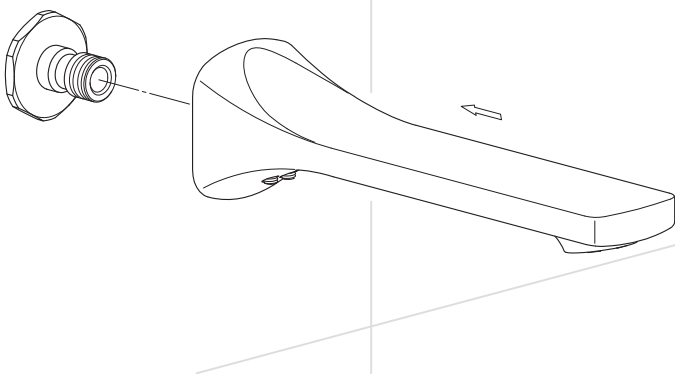


5

Tighten M6 screws with S3 wrench.

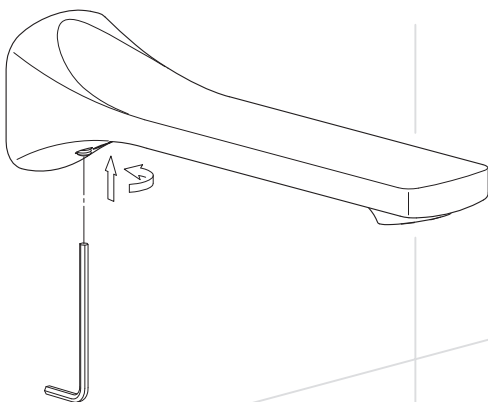


6

After installation, run water to check if the installation is correct.

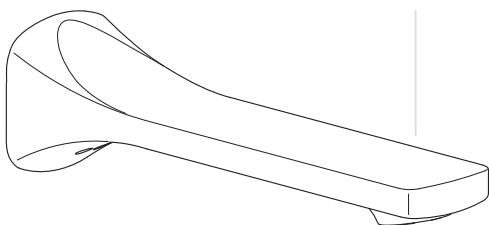

V. Cleaning:

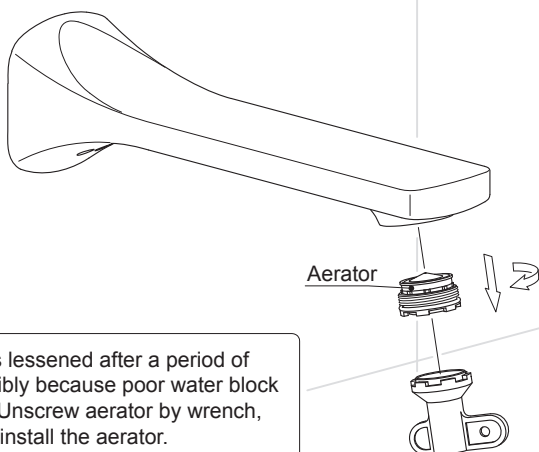

If flow rate is lessened after a period of usage, possibly because poor water block the aerator. Unscrew aerator by wrench, clean and reinstall the aerator.