



FEATURES

Lead-free brass construction
1 stream mode: aerated
Single volume and temperature lever control
145° spout rotation
3/8" connection

Ceramic cartridge #ALT75555600




Flow rate: 1.8 gpm - 6.8L/min
Mounting hole: 1-1/2"
Counter depth: min 1-3/8" max 2-3/8"

FINISHES

Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1	NSF/ANSI 61 and 372
CSA B125.1	EPA WaterSense®
ADA	

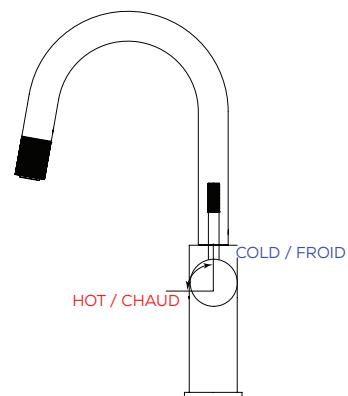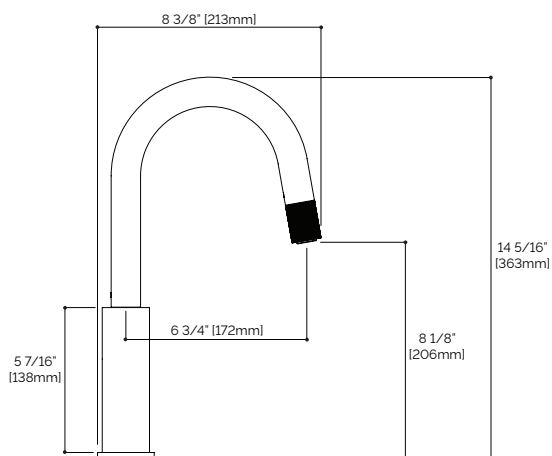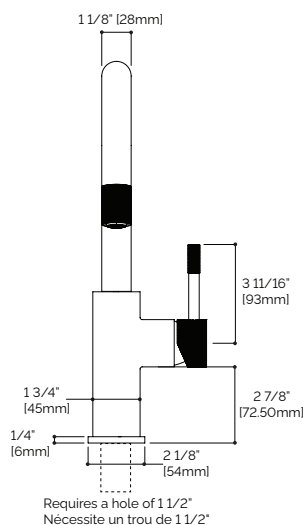

Quick access to warranty
and support:

