

XPR8295-XPR9295

XPR8395-XPR9395

XPress thermostatic valve trim kit with diverter for #90801



FEATURES

Round solid metal trim set
Single lever temperature control
Fluehs German-made diverter cartridge included
1 pair of round handles + 3 pairs of color lever included
XPress thermostatic valve not included (#90801)

Ceramic cartridges: #ABCA-TH-200 (2-way shared)
#ABCA-TH-300 (3-way shared)
#ABCA-TH-2LD (2-way non-shared)
#ABCA-TH-3LD (3-way non-shared)

FINISHES

Polished chrome (PC) Brushed Nickel PVD (BNVD)
Electro Black (EBK) Sunset PVD (SUVD)
White (WH)



CERTIFICATIONS & COMPLIANCE

ASME A112.18.1


CSA B125.1



ø 7 7/8" [200mm]

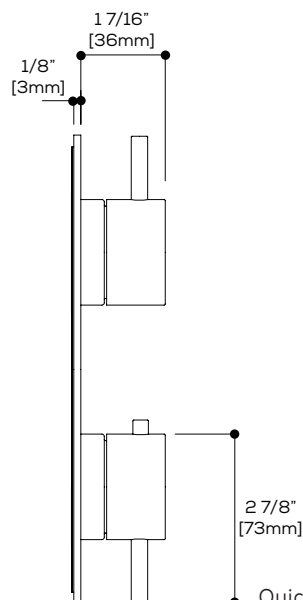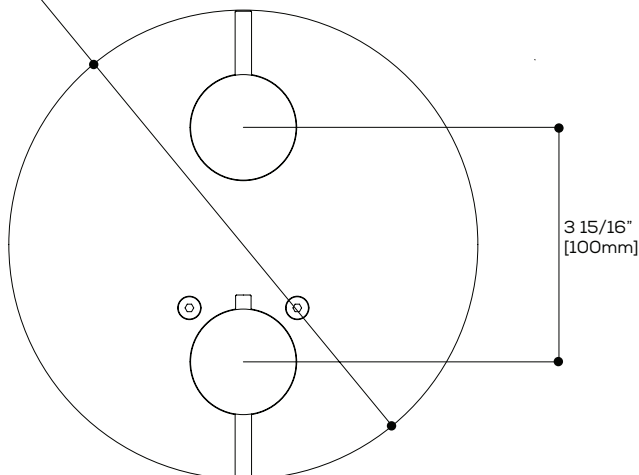

Quick access to warranty
and support:





FEATURES



15" round shower arm
Round flange
1/2" NPT male connection

FINISHES


Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	


CERTIFICATIONS & COMPLIANCE

ASME A112.18.1	CSA B125.1
----------------	------------

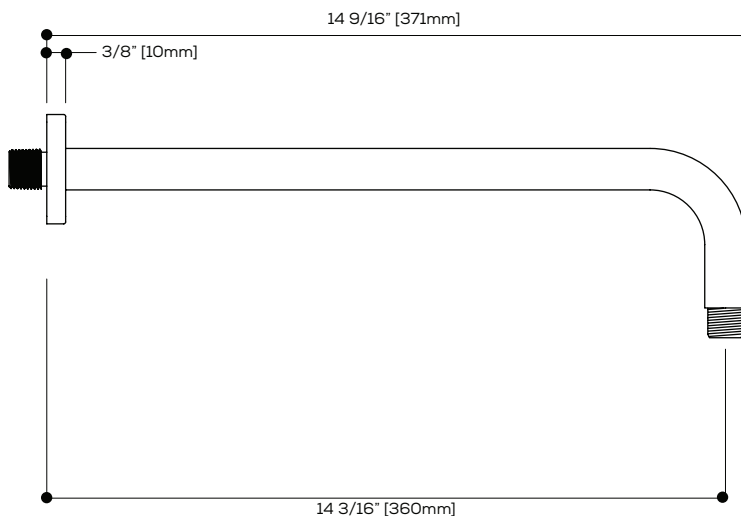

Quick access to warranty
and support:



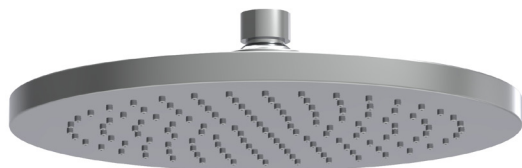

FEATURES

Stainless-steel construction
Contemporary style
Silicone spray nozzles for easy cleaning
1/2" female connection


Flow rate: 1.8 gpm

FINISHES


Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	

CERTIFICATIONS & COMPLIANCE


ASME A112.18.1	EPA WaterSense®
CSA B125.1	



Ø 9 1/2"
[241mm]

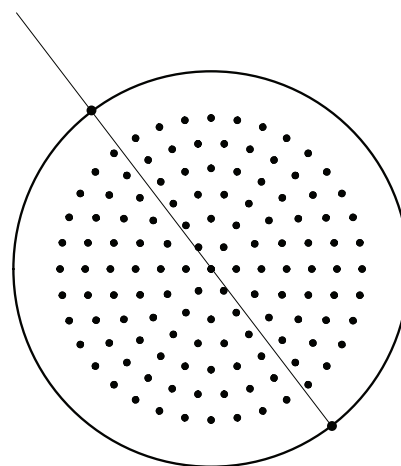

Quick access to warranty
and support:





FEATURES


Solid brass construction
1/2" NPT male connection

FINISHES


Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1	CSA B125.1
----------------	------------

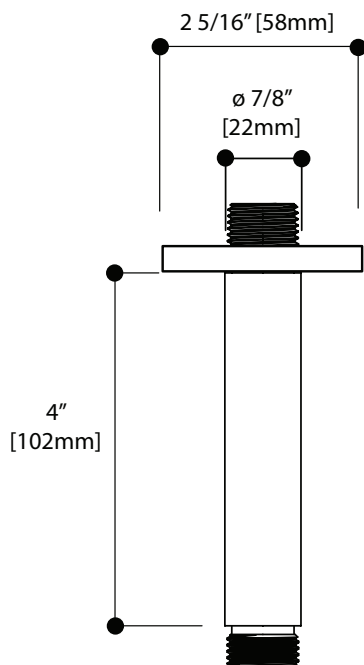

Quick access to warranty
and support:





FEATURES



Solid brass construction
1/2" NPT female connection
Adjustable flange

FINISHES


Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1	CSA B125.1
----------------	------------

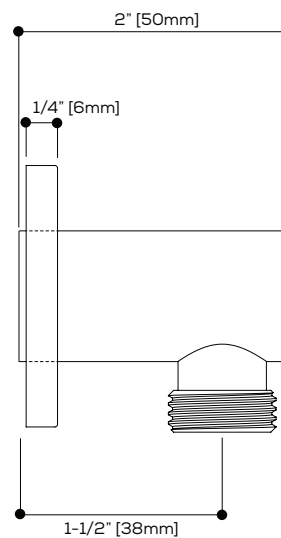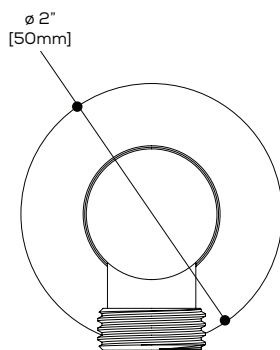

Quick access to warranty
and support:







FEATURES


Round rail with adjustable metal sliding hook
Metal bar (stainless steel)

FINISHES

Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	

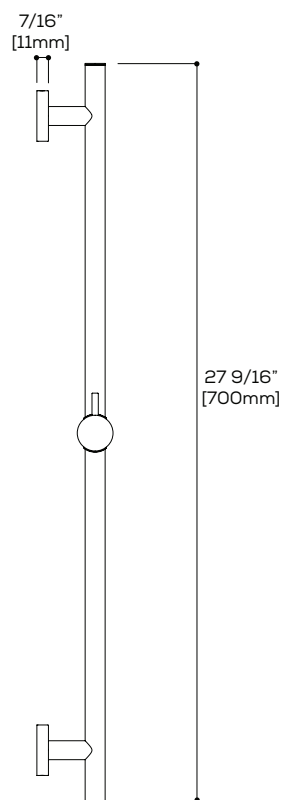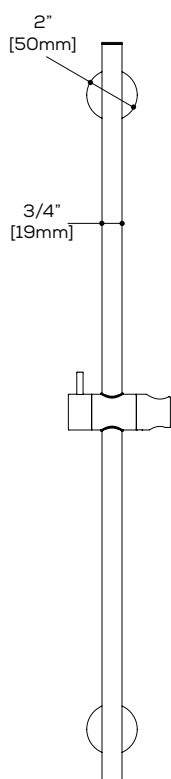

Quick access to warranty
and support:





FEATURES

3 functions: rain / rain-mist / jet



Flow rate: 1.8 gpm

FINISHES


Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1	EPA WaterSense®
CSA B125.1	

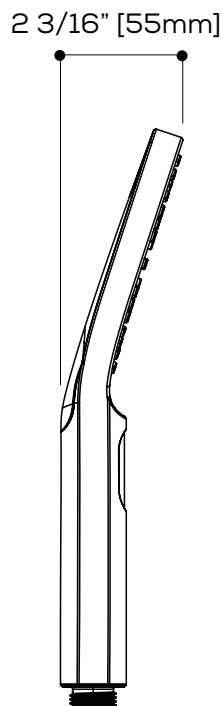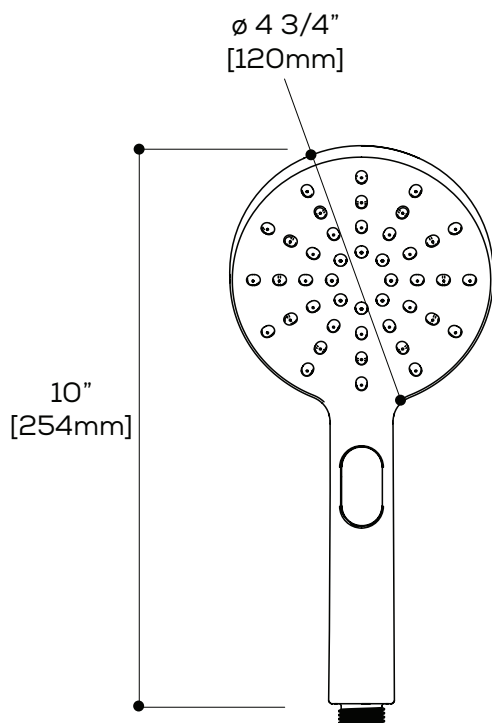

Quick access to warranty
and support:





FEATURES




Round spout without diverter
Solid brass
1/2" slip-fit inlet

FINISHES


Polished chrome (PC) Brushed Nickel PVD (BNVD)
Electro Black (EBK) Sunset PVD (SUVD)
White (WH)

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1 EPA WaterSense®
CSA B125.1

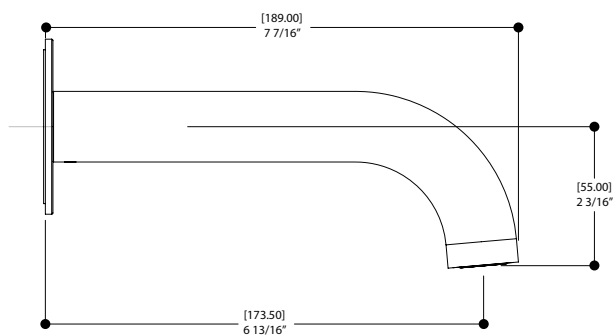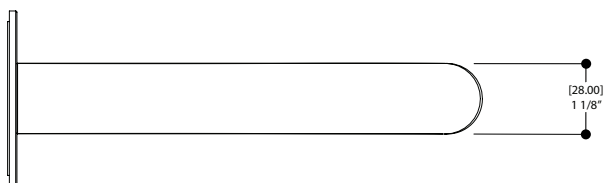

Quick access to warranty
—and support:





FEATURES


Double interlock 5' spiral hose
ANTI TWIST (one end with ball-bearing)
1/2" connections

FINISHES


Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	


CERTIFICATIONS & COMPLIANCE

ASME A112.18.1	CSA B125.1
----------------	------------

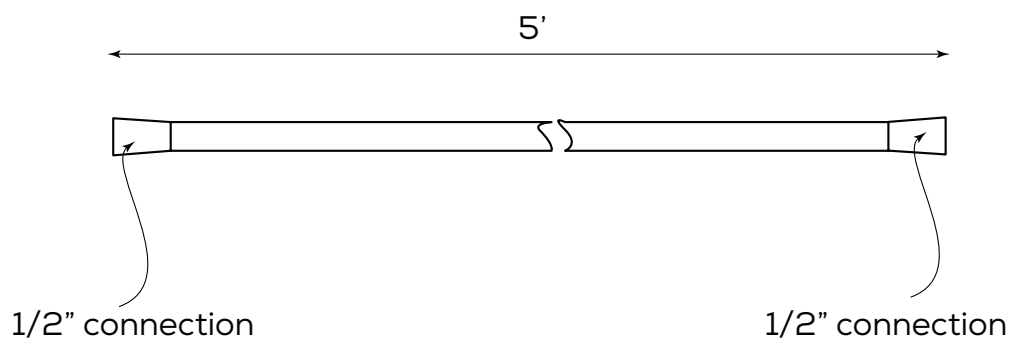

Quick access to warranty
and support:





FEATURES

Round rail with adjustable metal sliding hook
Metal bar (stainless steel)

Double interlock 5' spiral hose

3 functions: rain / rain-mist / jet



Flow rate: 1.8 gpm

FINISHES

Polished chrome (PC)	Brushed Nickel PVD (BNVD)
Electro Black (EBK)	Sunset PVD (SUVD)
White (WH)	

CERTIFICATIONS & COMPLIANCE

ASME A112.18.1	EPA WaterSense®
CSA B125.1	

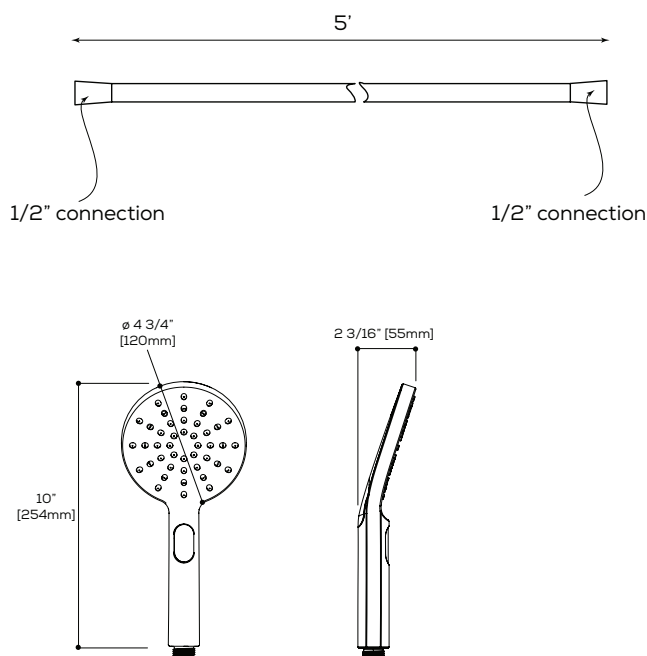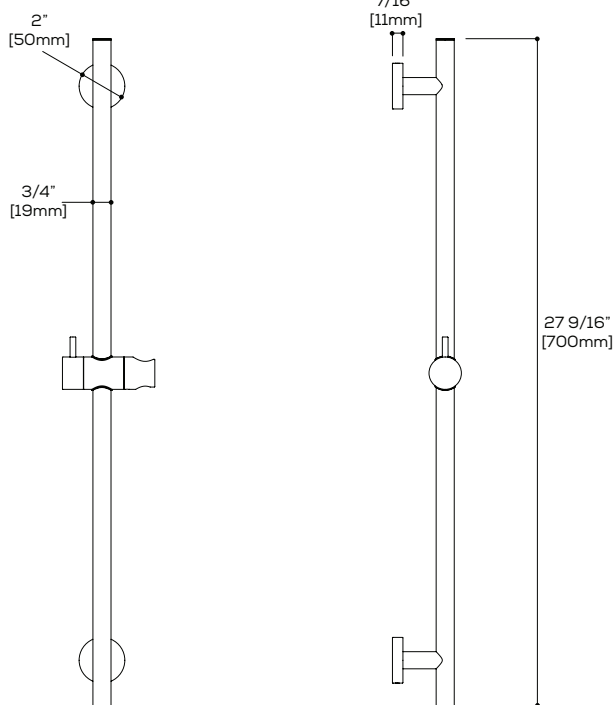

Quick access to warranty
and support:

