

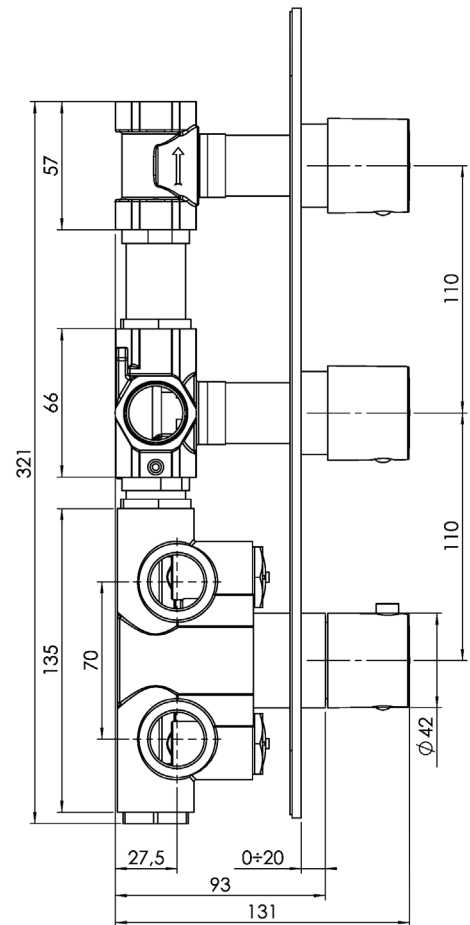


#om013

3/4" Thermostatic with 2 flow controls

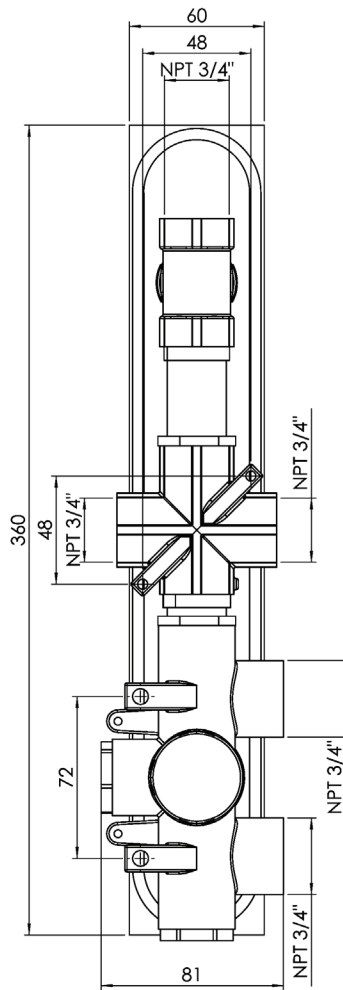

Can add independent flow control
Integrated service stops, filters & back-flow preventers
Rough-in can be mounted horizontally or vertically
13 GPM (49.2 L/min.)

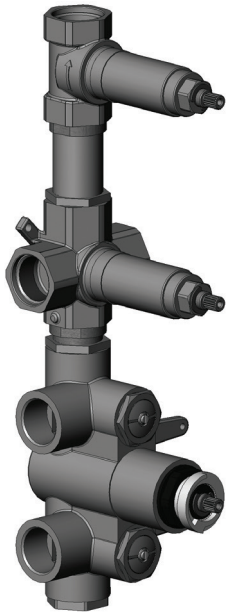