

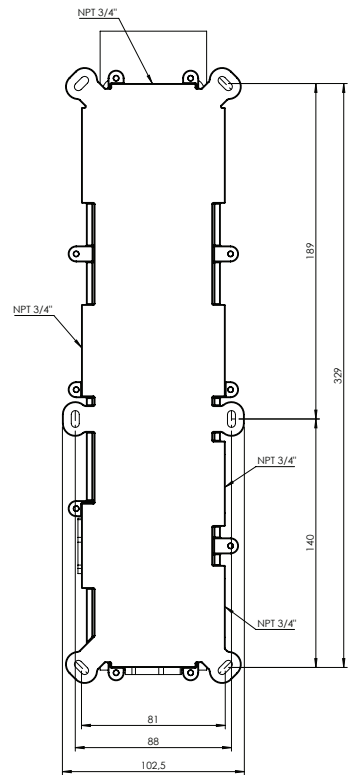


#om063

Thermostatic rough-in with 2 push button controls

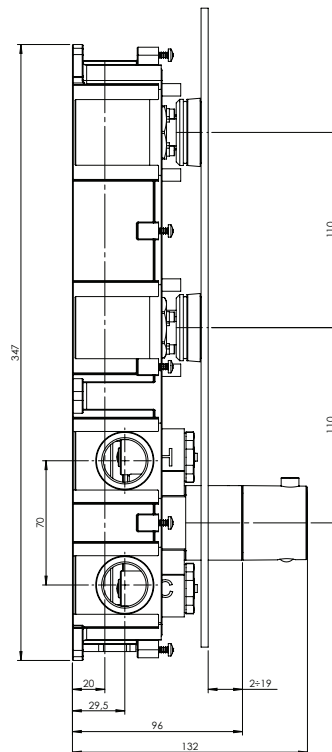

Can add independent control
Integrated service stops, filters & back-flow preventers
Rough-in can be mounted horizontally or vertically
100% flow when on
13 GPM (49.2 L/min.)
Extension available

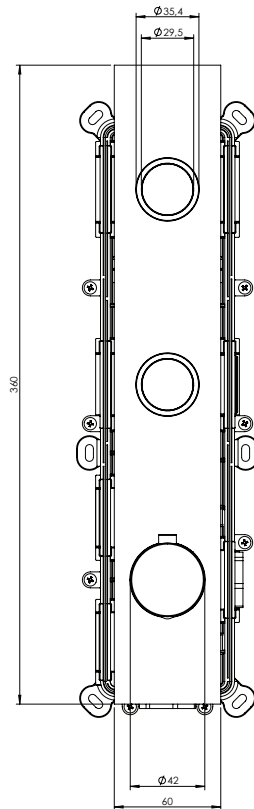