



FEATURES

Solid brass construction
Pressure balance cartridge
Aerated water flow
Single volume and temperature lever control
Handshower with 5' reinforced PVC hose
Pull-button diverter situated in front of the spout
1/2" connection
Featuring "easy fit" system

FINISHES



Standard
polished chrome (pc)
brush nickel (bn)
Custom
15 custom finishes available
(ask your local Aquabrax authorized dealer for details)

SPECS AT LARGE

Overall spout projection: 13 1/2" Flow rate (tub filler): 6 gpm
CC spout projection: 8 7/8" Flow rate (handshower): 2.5 gpm
Total faucet height: 38 1/4"

WARRANTY


Residential: limited lifetime warranty to original purchaser
Commercial: two years warranty
(Complete warranty available at www.aquabrax.com/warranty)

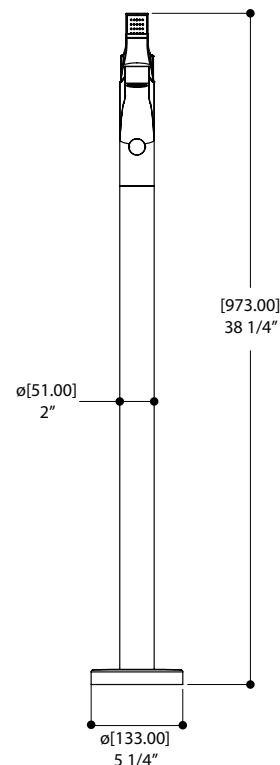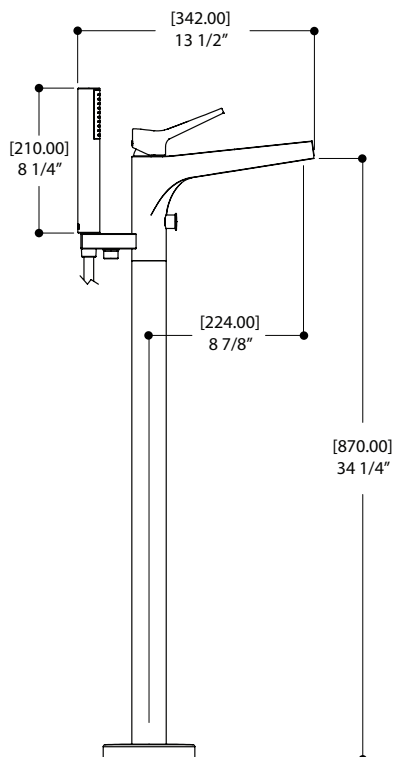

AQUABRASS

"EASY FIT"

a job-site friendly installation system



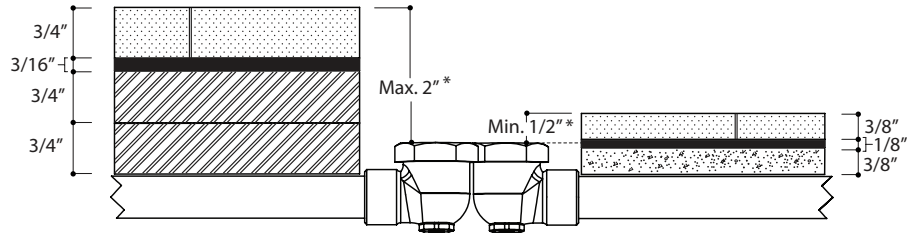


* If set deeper, use standard commercially available male-female extension

* Si c'est plus profond, utiliser une extension mâle-femelle standard

Ouverture recommandée:
ø 2 1/2" ou moins

Recommended opening:
ø 2 1/2" or less

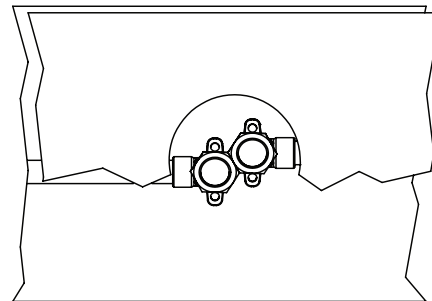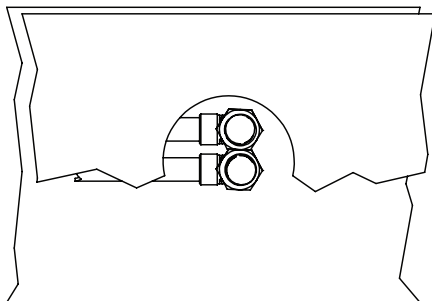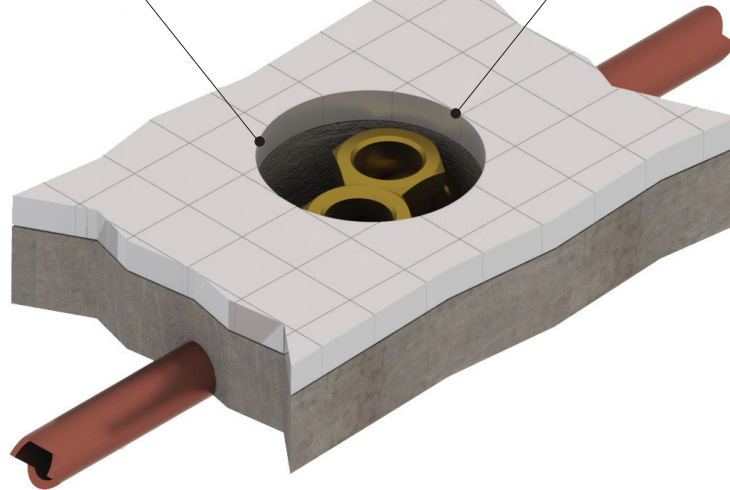

Optimize your rough configuration for a minimum C-C between hot & cold inlets (see examples).
The orientation of the pair of supply connections is independent from the final spout position.

Optimiser la configuration du brut pour minimiser le C-C entre l'entrée d'eau chaude et froide.
L'orientation des alimentations n'a aucun impact sur la direction finale du bec.