# **KOHLER**<sub>®</sub>

# Revel® Frameless Sliding Shower Door K-707201-L

#### Features

- Center-guided mechanism for smooth, quiet sliding action and easy cleaning
- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability

#### Material

 Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass

#### Technology

- Frameless design with minimal metal allows for greater ease of cleaning
- Low bottom track creates easy entry and exit to the bathing space

#### Installation

- Out-of-plumb adjustability simplifies installation
- Sliding shower door
- Not for use in hospitality
- For residential use only



# **Codes/Standards**

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

#### KOHLER<sup>®</sup> Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description



SHP Bright Polished Silver

- ABZ Anodized Dark Bronze
- BNK Anodized Brushed Nickel


#### Available Glass Options Code Description

L Crystal Clear





# Revel® Frameless Sliding Shower Door K-707201-L

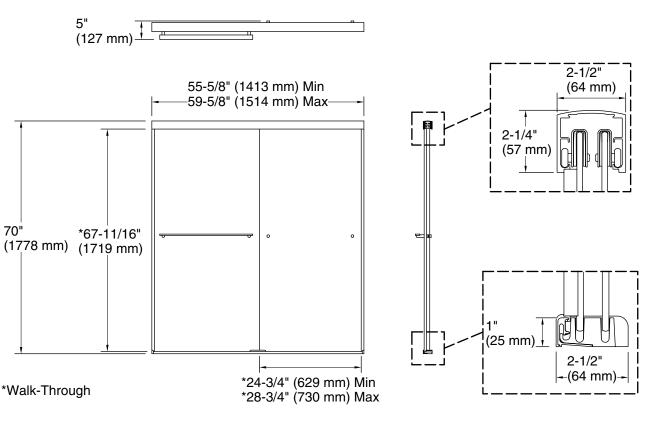

## **Technical Information**

All product dimensions are nominal. Base-To-Wall 3/8" (10 mm) Radius – Max: Shower Ledge Min 2-1/2" (64 mm) Flat: Shower Wall Min 2-1/2" (64 mm) Flat:

## Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 72-1/2" (1842 mm) to allow clearance for installing the top track over the wall jambs.

The vertical opening should be a minimum of 72-1/2" (1842 mm) to allow for installation clearance.

