

60" x 30-1/4" alcove bath, right drain **K-716** 

### Features

- 60"L x 30-1/4"W x 14"H
- Our most popular bath
- Integral apron for quick installation
- Safeguard<sup>®</sup> slip-resistant surface provides excellent traction underfoot
- Integral lumbar support

#### Material

KOHLER<sup>®</sup> enameled cast iron

#### Installation

- Alcove
- Integral flange
- Right drain

# **Required Products/Accessories**

K-T37391 Rotary-turn bath drain trim K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing K-78438 30" cable bath drain

#### **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow K-1601 Bath/whirlpool footstop, removable K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain K-706000-D3 Frameless Sliding Bath Door K-706000-L 62" H sliding bath door with 1/4"-thick glass K-706004-D3 Frameless Sliding Bath Door K-706004-L Frameless Sliding Bath Door K-23726 Drain treatment K-23725 Cast iron cleaner



# ADA

# Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462 ADA ICC/ANSI A117.1 IAPMO Certification

# KOHLER<sup>®</sup> Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.


### **Color Code Description**

0	White
96	Biscuit





# 60" x 30-1/4" alcove bath, right drain **K-716**

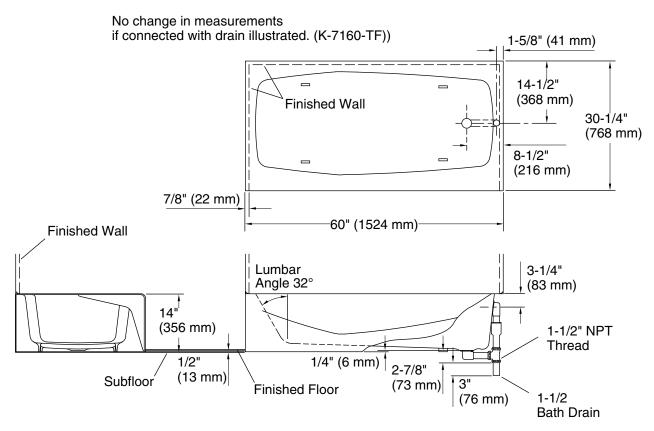

# **Technical Information**

All product dimensions are nominal.

Drain location:	Right
Basin area, bottom:	45" x 22" (1143 mm x 559 mm)
Basin area, top:	55" x 24" (1397 mm x 610 mm)
Weight:	316 lbs (143.3 kg)
Minimum floor load:	49 lbs/ft² (239.2 kg/m²)
Water depth:	8-5/8" (219 mm)
Water capacity:	33 gal (124.9 L)
Minimum flat for door:	1-7/8" (47 mm)

# Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

