

60" x 30" alcove bath with Bask® heated surface, right drain K-1946-RW

### Features

- Bask<sup>®</sup> heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Three heat settings allow you to customize the surface temperature
- Comfort Depth<sup>®</sup> design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface
- Coordinates with other products in the Archer collection

### Material

Acrylic

### Installation

- Right drain
- Alcove

### **Required Products/Accessories**

- K-7271 Brass Slotted Overflow Bath Drain or
  - K-7272 PVC Slotted Overflow Bath Drain

### **Recommended Products/Accessories**

K-23726 Drain treatment K-23732 Tub & shower cleaner K-31797 Slotted overflow bath drain kit K-31795 Slotted overflow above-the-floor bath drain kit



# ADA

Codes/Standards CSA B45.5/IAPMO Z124 UL 1795 ADA ICC/ANSI A117.1 IAPMO Certification UL Listed

KOHLER® Plastic Baths and Receptors Lifetime Limited WarrantyKOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.




## Archer®



60" x 30" alcove bath with Bask® heated surface, right drain

## K-1946-RW

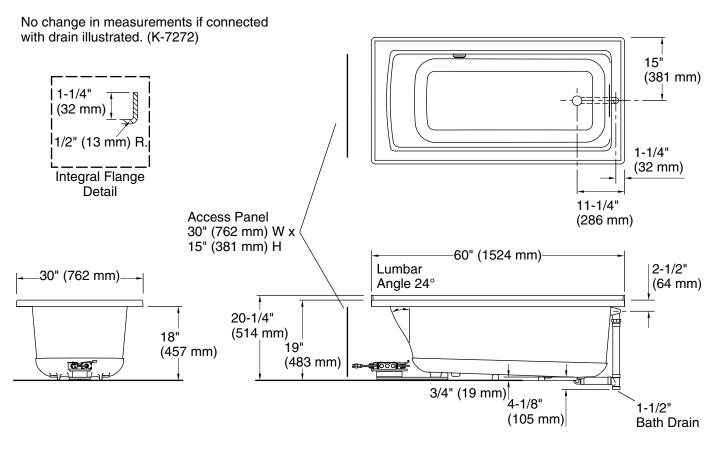

### **Required Electrical Service**

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD). Heated Surface: 120 V, 15 A, 60 Hz

### **Technical Information**

All product dimensions are nominal.

Drain location:	Right
Basin area, bottom:	45-1/8" x 19-11/16" (1146 mm x
	500 mm)
Basin area, top:	52-1/8" x 22-1/16" (1324 mm x 560 mm)
Weight:	68 lbs (30.8 kg)
Minimum floor load:	45.5 lbs/ft² (222.2 kg/m²)
Water depth:	15-1/8" (384 mm)
Water capacity:	57 gal (215.8 L)
Electrical component rating:	Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W
Minimum flat for door:	2-9/16" (65 mm)

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

### 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u> USA or <u>www.kohler.ca</u> Canada 2-28-2024 22:09 - US

