

Loure® Touchless faucet w/Kinesis® sensor, AC-powered K-103L76-SANL

Features

- Kinesis[®] technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- Requires K-13480 single or K-13481 multiple AC adapter unit
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant laminar outlet
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- 3-7/8" (98 mm) spout reach
- Grid drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)
- Includes spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware

Material

- Brass spout
- Cast brass valve

Technology

 Kinesis® sensor technology offers on-demand detection for maximum water savings

Installation

Single-hole mounting

Required Products/Accessories

K-13480-A AC Single Supply

or

K-13481-A Multi-Outlet Power Supply

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner

Optional Products/Accessories

K-13478-A 4" escutcheon plate for InsightTM and Kinesis[®] faucet

K-13478-B 4" escutcheon plate for Insight[™] and Kinesis® faucet

K-13479-A 8" escutcheon plate for Insight[™] and Kinesis® faucet

K-13479-B 8" escutcheon plate for Insight™ and Kinesis® faucet

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u> USA or <u>www.kohler.ca</u> Canada 2-25-2024 22:39 - US





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

KOHLER® One-Year Limited

Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

CP	Polished Chrome	
----	-----------------	--


BN	Vibrant® Brushed Nickel

- BL Matte Black
- 2MB Vibrant® Brushed Moderne Brass



KOHLER, Faucets

Loure® Touchless faucet w/Kinesis® sensor, AC-powered K-103L76-SANL

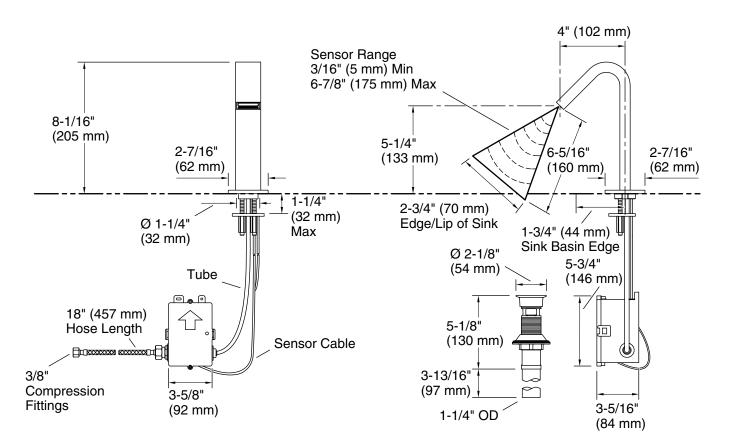

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD). 120/240 V, 50/60 Hz

Technical Information

All product dimensions are nominal.

Power source:	Hardwire - AC and Plug - AC, not included
Faucet:	
Flow rate:	0.5 gal/min (1.9 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	Yes
Spout:	
Spout reach:	3-7/8" (99 mm)

Notes

Install this product according to the installation instructions.

A 1-1/4" (32 mm) minimum to 1-1/2" (38 mm) maximum diameter mounting hole is required. The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (44 mm). This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be 1-3/4" (44 mm).

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

