

## Features

- Fixture-mount design
- Retrofit models require a control stop and vacuum breaker

## Material

- Brass

## Technology

- Nonhold open piston technology for accurate activation

## Installation

- Intended for toilet installations with 1-1/2" spud coupling connection

## Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

## Codes/Standards

ASME A112.18.1/CSA B125.1

CSA B64

CSA B125.3

ASSE 1037/ASME A112.1037/CSA B125.37

All applicable US Federal and State material regulations

EPA WaterSense®

ADA

ICC/ANSI A117.1


CSA B651

OBC

IAPMO Certification

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

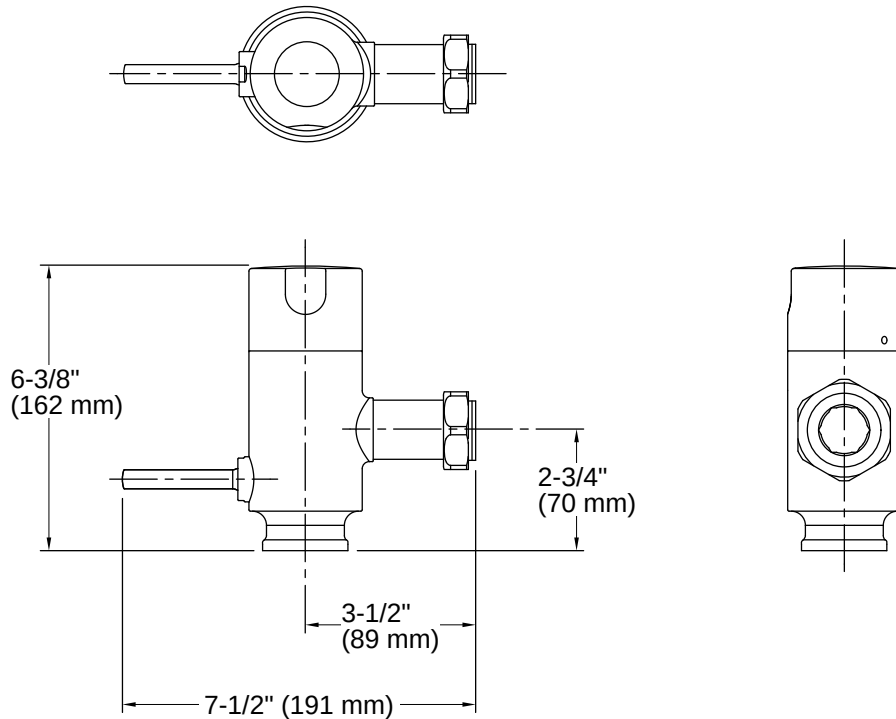

## Technical Information

All product dimensions are nominal.

### Spout:

### Handshower:

Rated maximum flow: 0 gal/min (0 l/min)

## Pressure/fixture Supply Requirements

Fixture pressure max (static): 80 psi (551.6 kPa)  
Min flowing pressure: 25 psi (172.4 kPa)  
Min flow rate: 25 gpm (94.6 lpm)

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.